

/ Descriptions

2A ABS/LBF
2A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.

/ Features


100V~1000V 2.0A

Glass Passivated Chip Junction, Reverse Voltage :100 to 1000V,Forward Current: 2.0A, Fast reverse recovery time, Designed for Surface Mount Application. Halogen free product.


/ Applications

General purpose.


/ Equivalent Circuit



/ Pinning



PIN	DESCRIPTION
1	Input Pin ($\sim$)
2	Input Pin ($\sim$)
3	Output Anode (+)
4	Output Cathode (-)

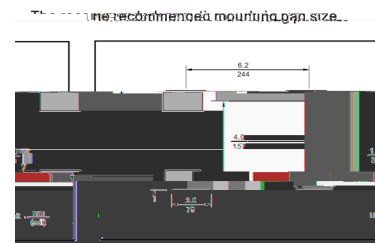


/ Marking

See Marking Instructions.

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------


/ Package Dimensions

ABS/LBF

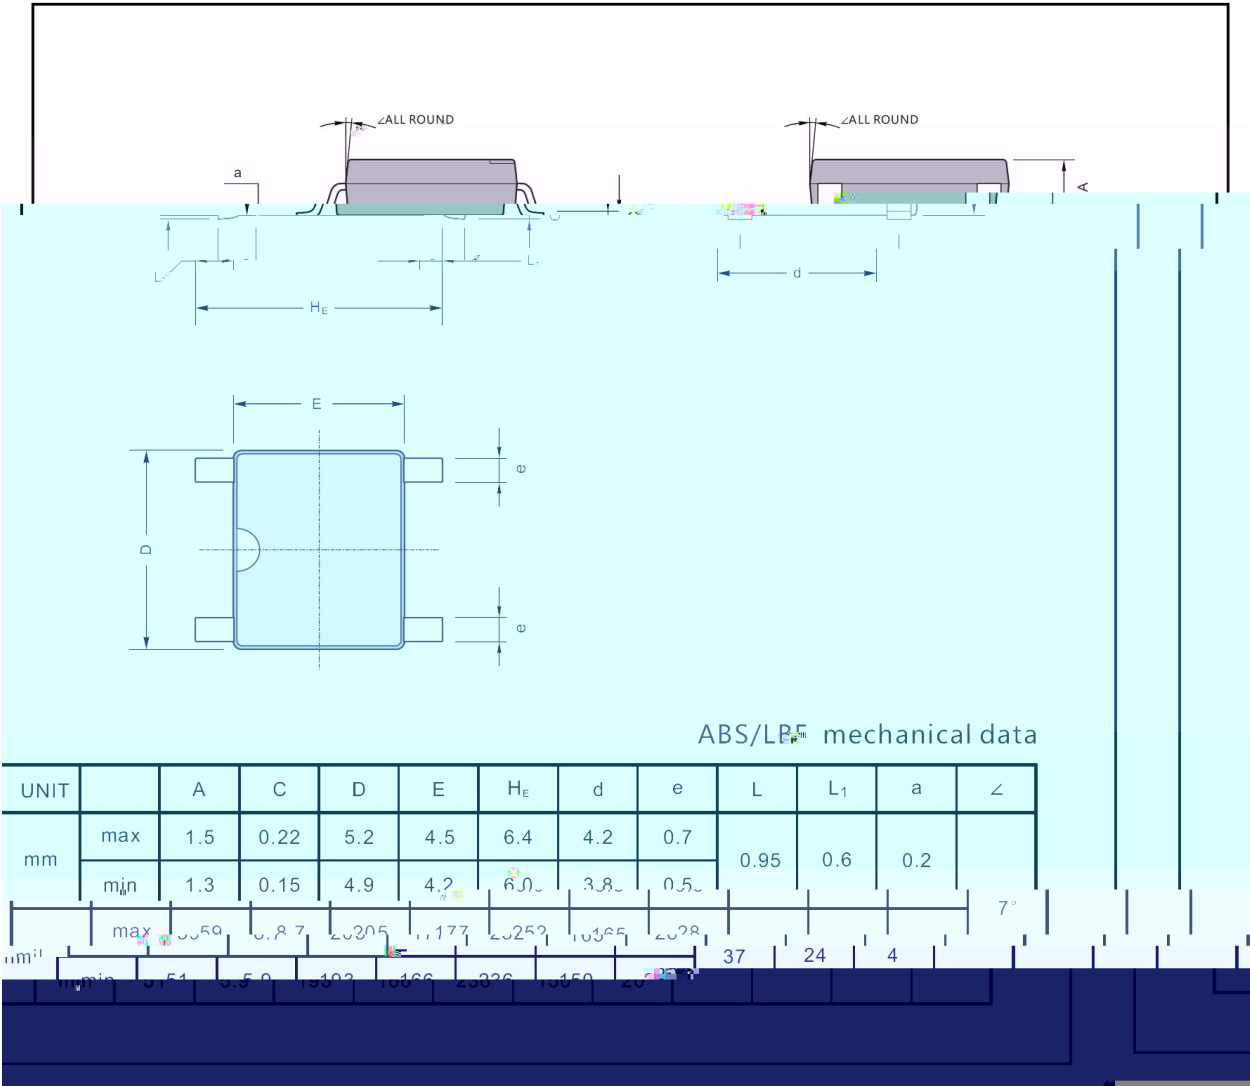


/ Marking Instructions

Marking

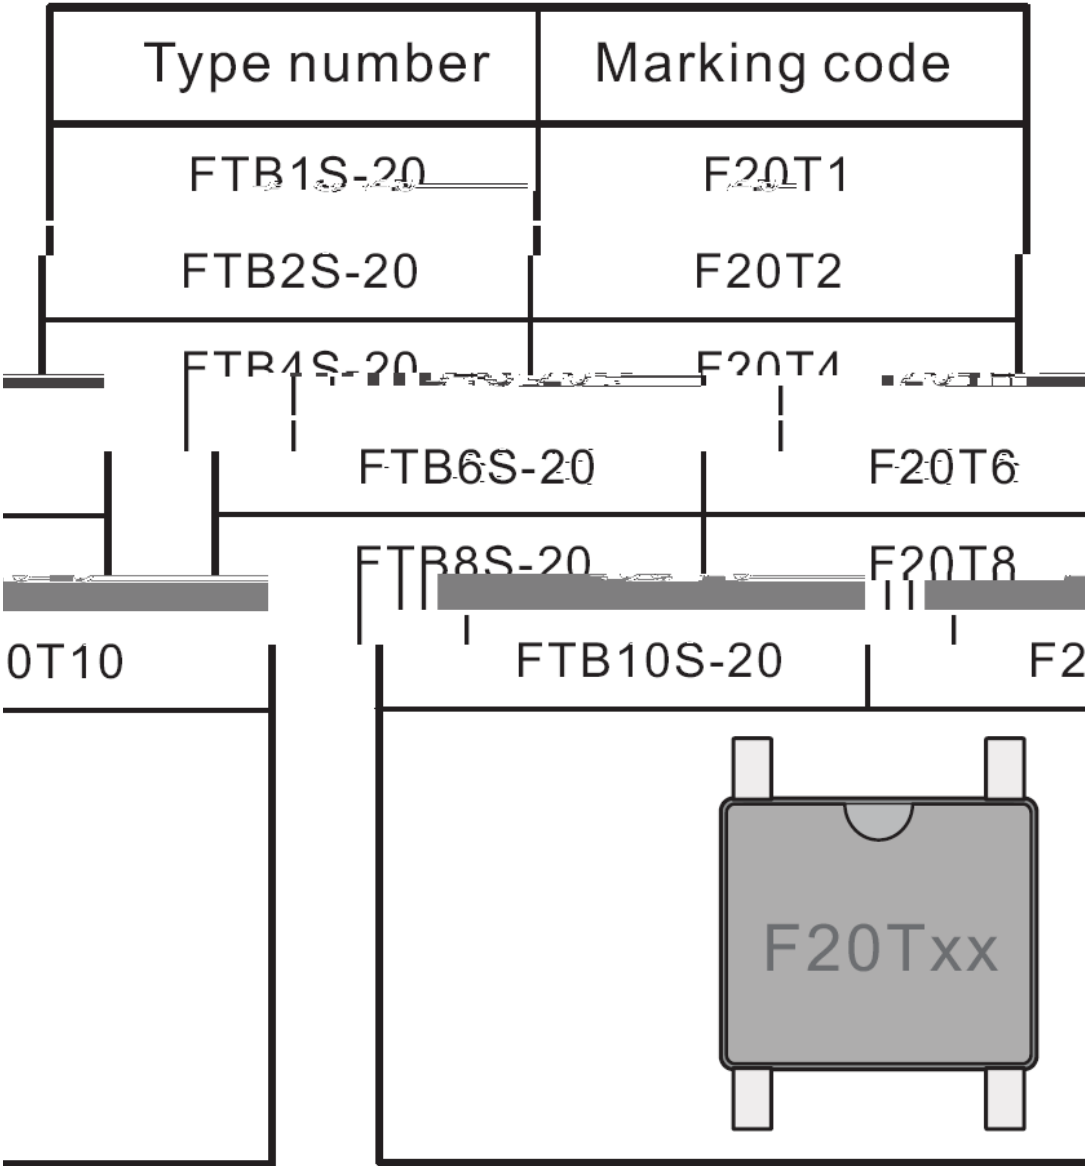

/ Marking Instructions

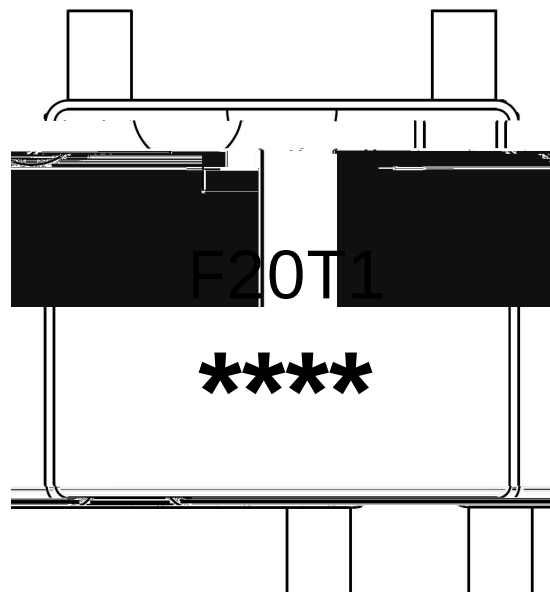

F20T1

1 *

3 *

Note:

F20T1 Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No Code

