



Silicon PNP transistor in a SOT-323 Plastic Package.



/ Electrical Characteristic Curve

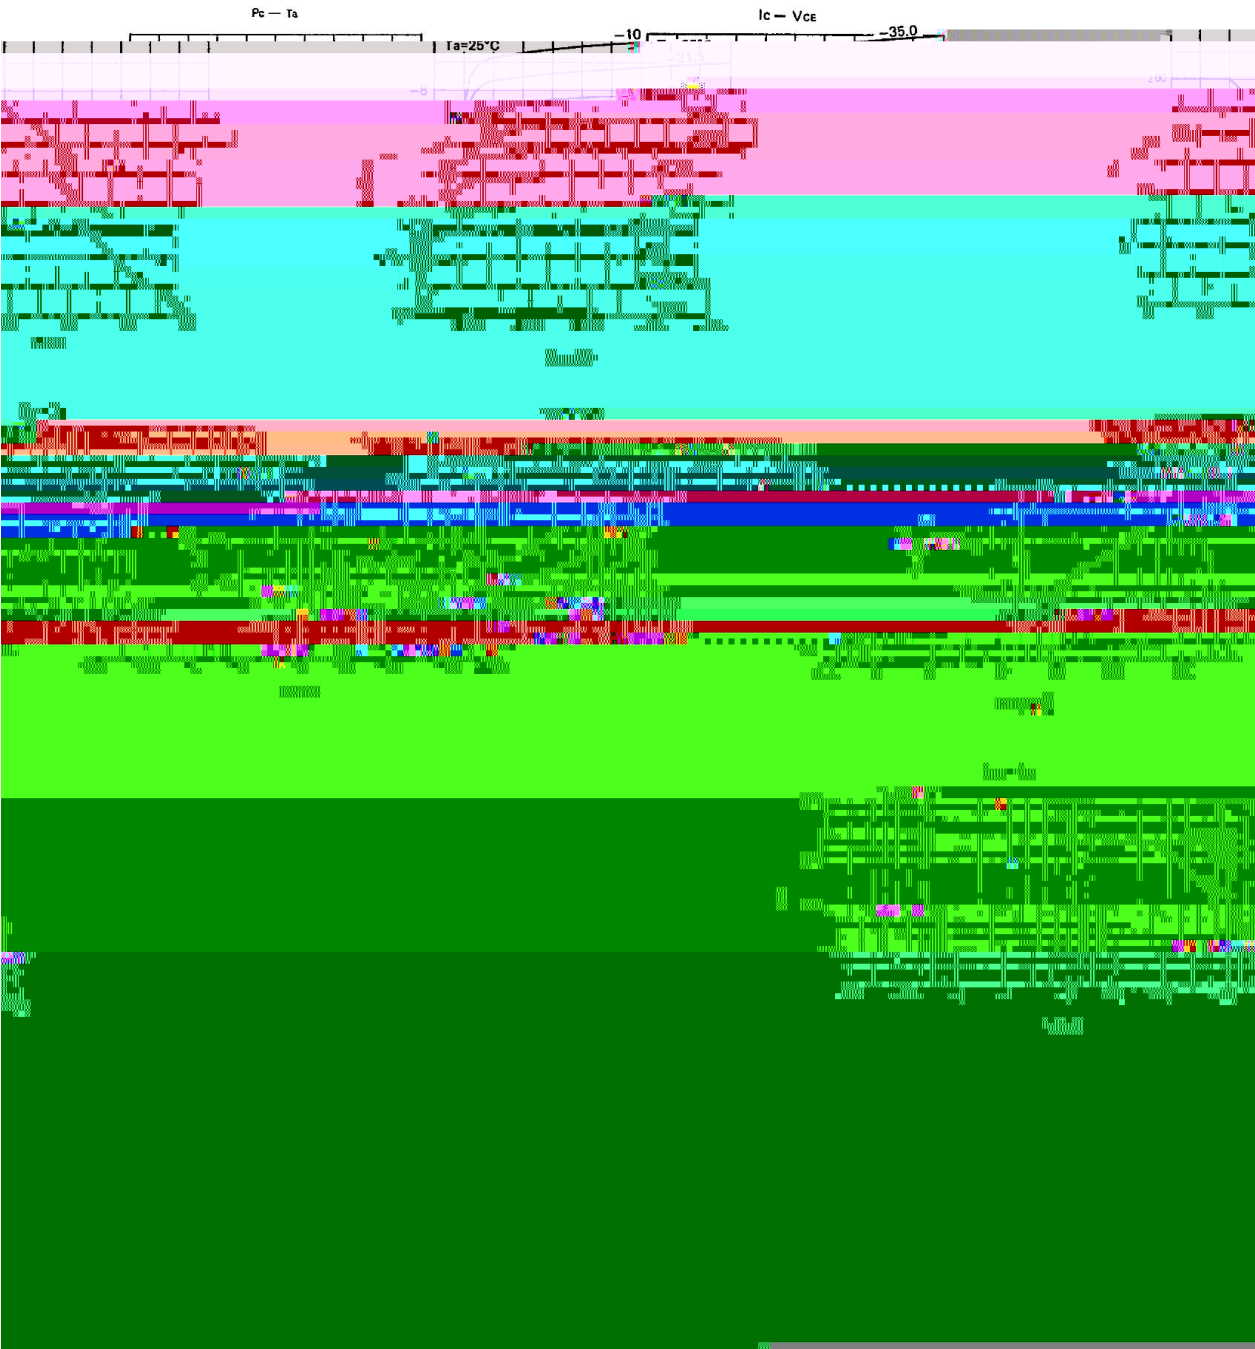

BR2SA1576AQ


Rev.A Apr.-2023



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET


/ Marking Instructions

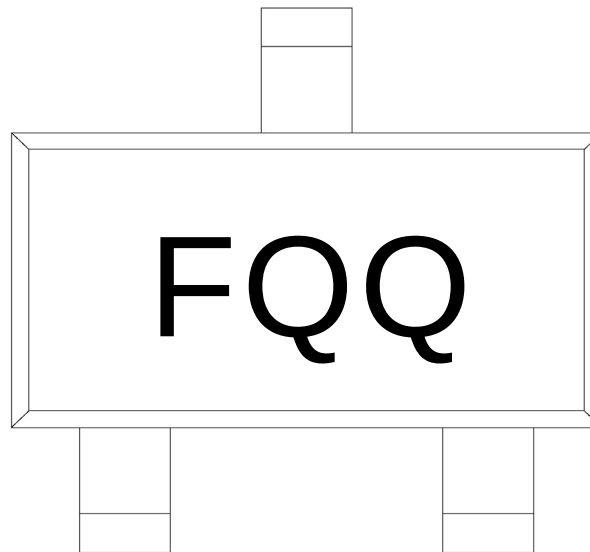

Note:

- F: Product Type
- Q: Automobile halogen-free product Code
- Q h_{FE} Classifications Symbol

() / Whp shrdwxrh Prriioh irr IU Uhiow Vroghriqj+Pe-Frhh,

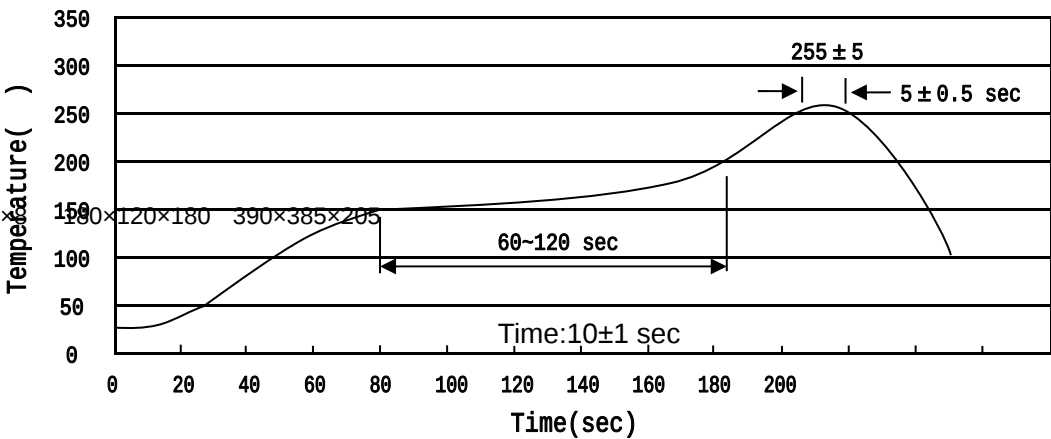

Note:

1 150 200 60 120sec; 1.Preheating:150~200

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5

/ Packaging SPEC.

/ REEL

mm
Outer Box

Package Type	Units		Dimension			(unit ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	
SOT-323	3,000	10	30,000	6	180,000	7		

/ Notices