

SOD-123 .> // x RK Ô Â 8 â 'ož
Schottky Diode in a SOD-123 Plastic Package.

z 3 g 9 ' k ... ` ' +) 7 ö Ö ä U ´ Å } L k —)í D }ož
Low positive pressure drop, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

%² " (k á V ñ • } Lož
General purpose, Meet the stringent requirements of automotive applications.




PIN1:Cathode PIN2:Anode


, M V

@ f Parameter	... Z Symbol	f > Rating			% y Unit
		BRB5817WQ	BRB5818WQ	BRB5819WQ	
Peak Repetitive Reverse Voltage					

Electrical Characteristic Curve

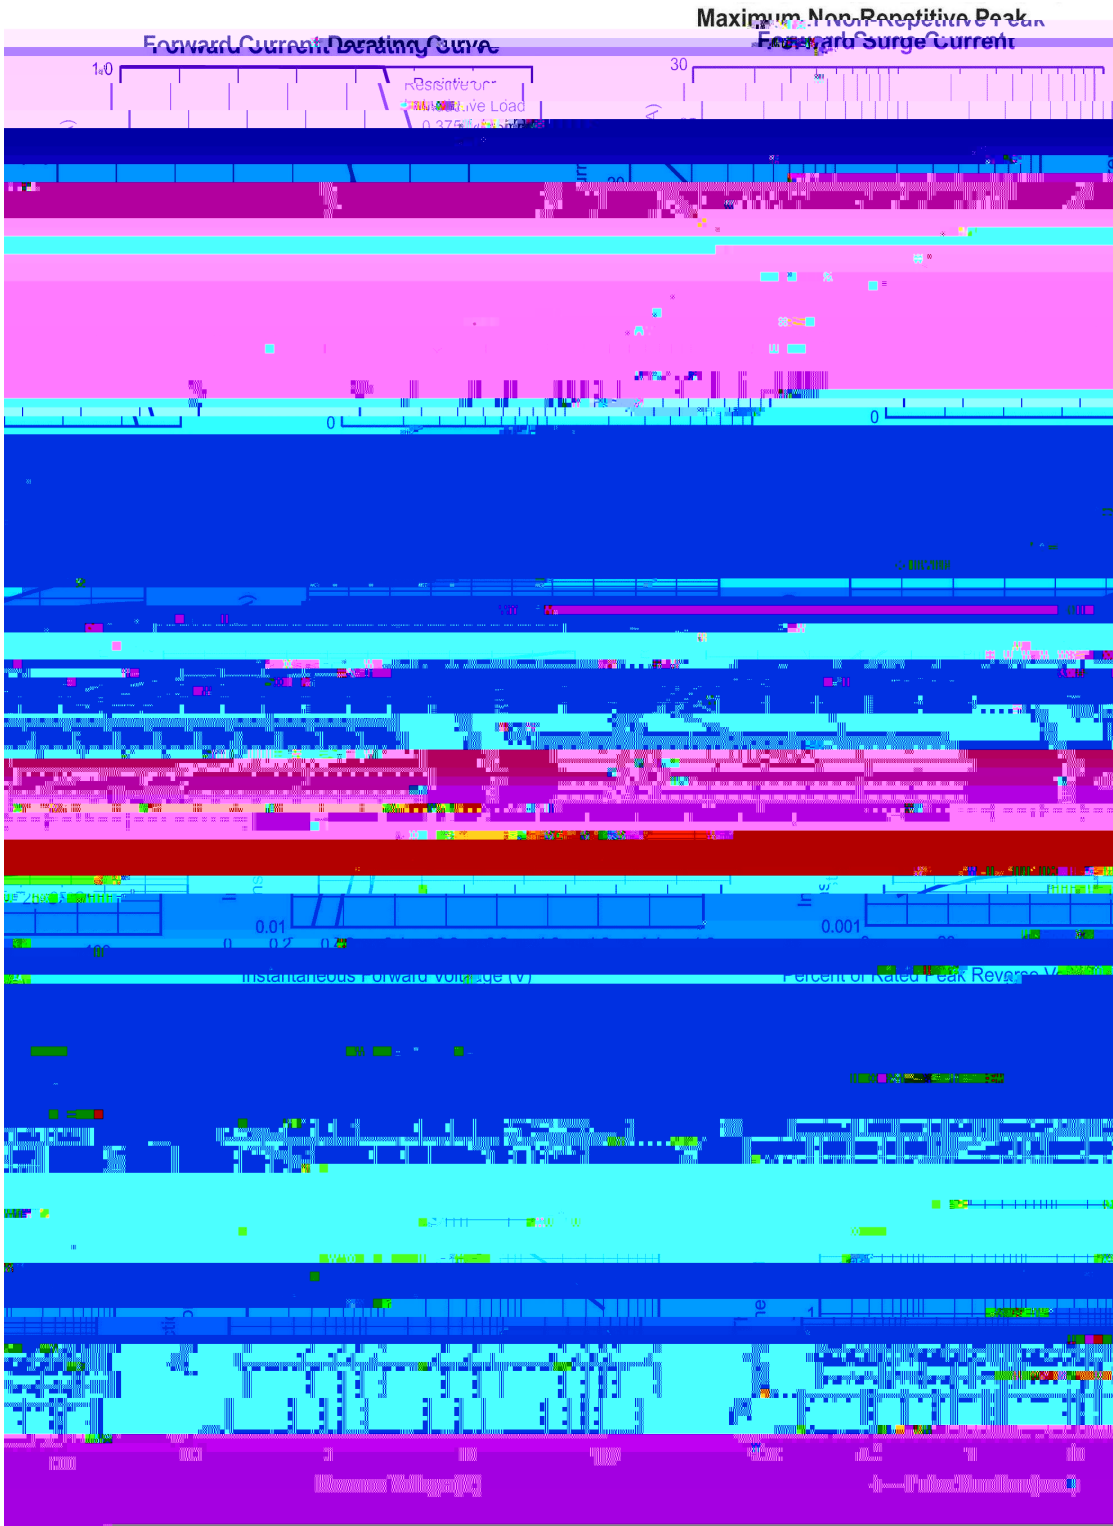

Ø □ =) ⌀ / Package Dimensions

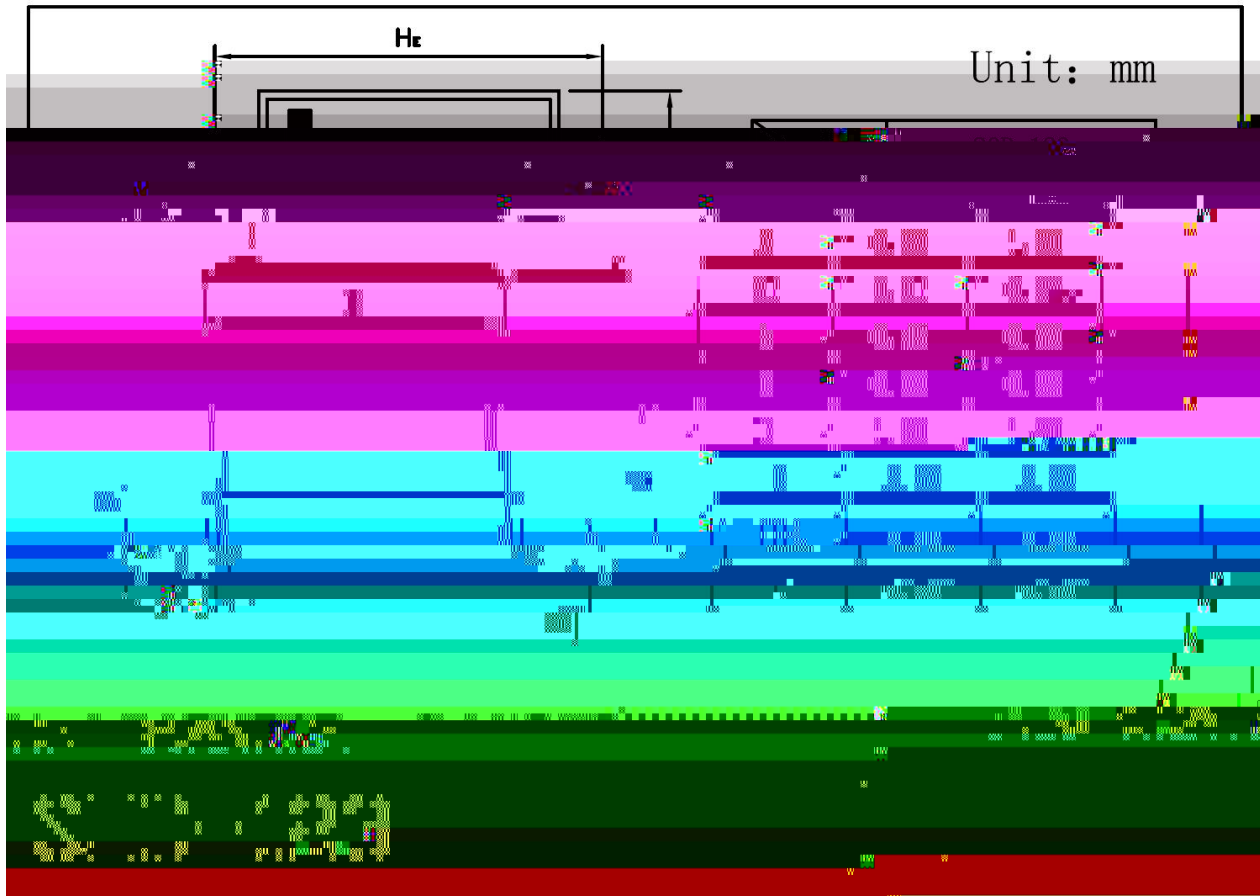

, M y f / Marking Instructions



^a ¢ y

7 y V ñ —) í D } ö œ

9 0 y ° Z W A

Note:

Q: Automobile halogen-free product Code

SJ: Product Type

BRB5817WQ-BRB5819WQ
Rev.B Apr.-2023