



C	2018-4				
D	2019-1-12	1			
E	2020-1-3		SX Rdson 50		
F	2021-4-13	2	3230		



Rev. F Apr.-2021

BRCL3130MC	/	BRCL3130MC
	MOSFET	
BRCL3130MC	SOT23-3	
	BRCL3130MC	


The BRCL3130MC series product is a high integration solution for lithium-ion/polymer battery protection. BRCL3130MC contains advanced power MOSFET, high-

Rev. F Apr.-2021



Rev. F Apr.-2021

/Parameter	/Symbol	/Value	/Unit
V _{DD} input pin voltage	V _{IN}	-0.3 to +6.0	V
V _M input pin voltage	V _{VM}	-6.0 to +10	V
Power Dissipation	P _D	400	mW
Maximum Junction Temperature	T _J	125	°C
Lead Temperature	T _L	300	°C
Operating Junction Temperature	T _{opr}	-40 to +85	°C Operati

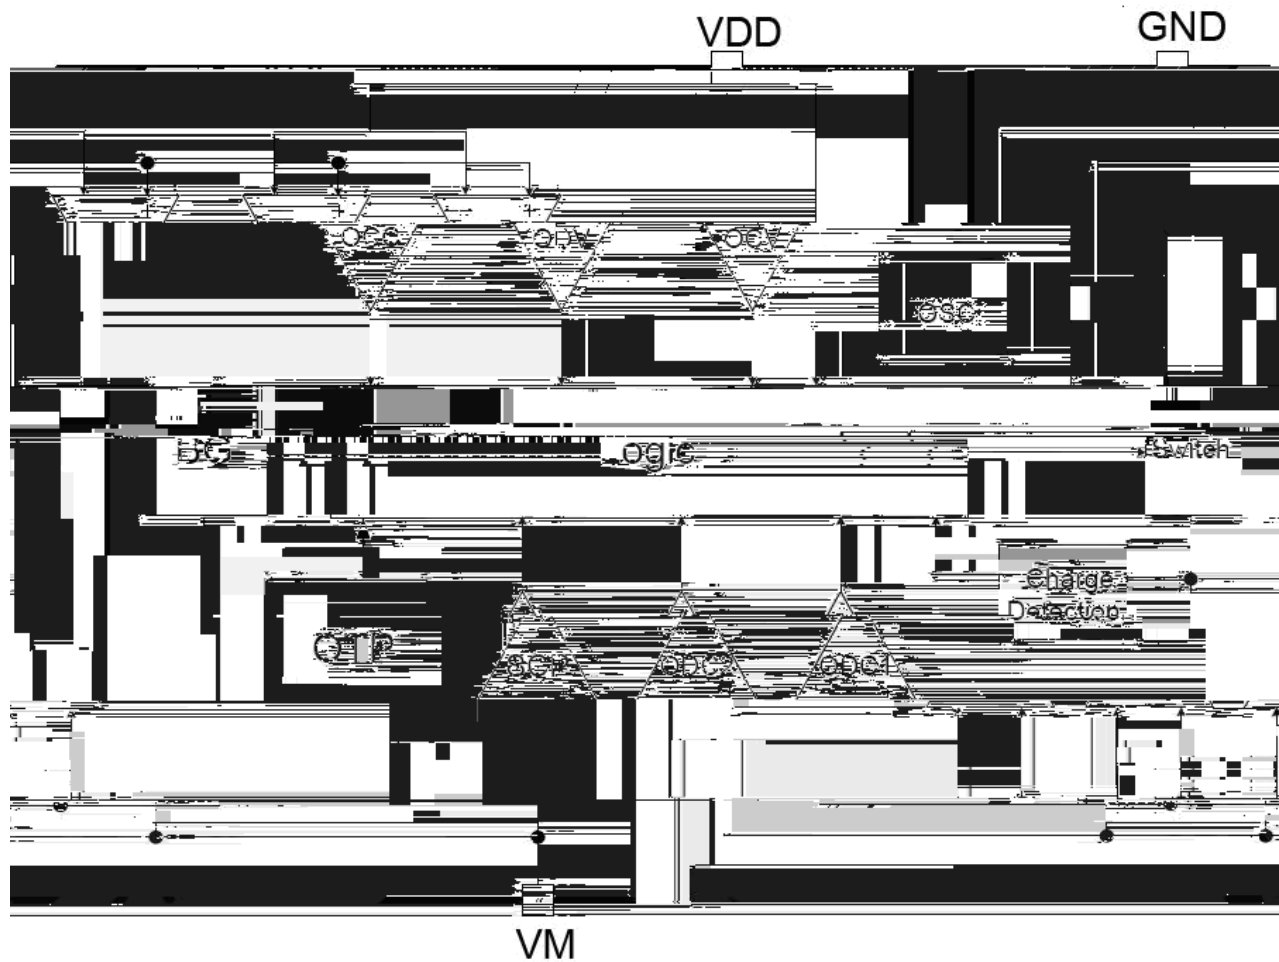

BRCL3130MC

MOSFET

50mΩ

The BRCL3130MC monitors the voltage and current of a battery and protects it from being damaged due to overcharge voltage, overdischarge voltage, overdischarge current, and short circuit conditions by discon



Rev. F Apr.-2021



TCU BRCL3130MC FET VCU ,

1 VCL BRCL3130MC

2 BRCL3130MC

BRCL3130MC VM 0.7V

VCU BRCL3130MC VCU

VCU VCU

VM 1

VCU



Rev. F Apr.-2021



TDL

BRCL3130MC

VDL



,

Rev. F Apr.-2021



Rev. F Apr.-2021




Rev. F Apr.-2021

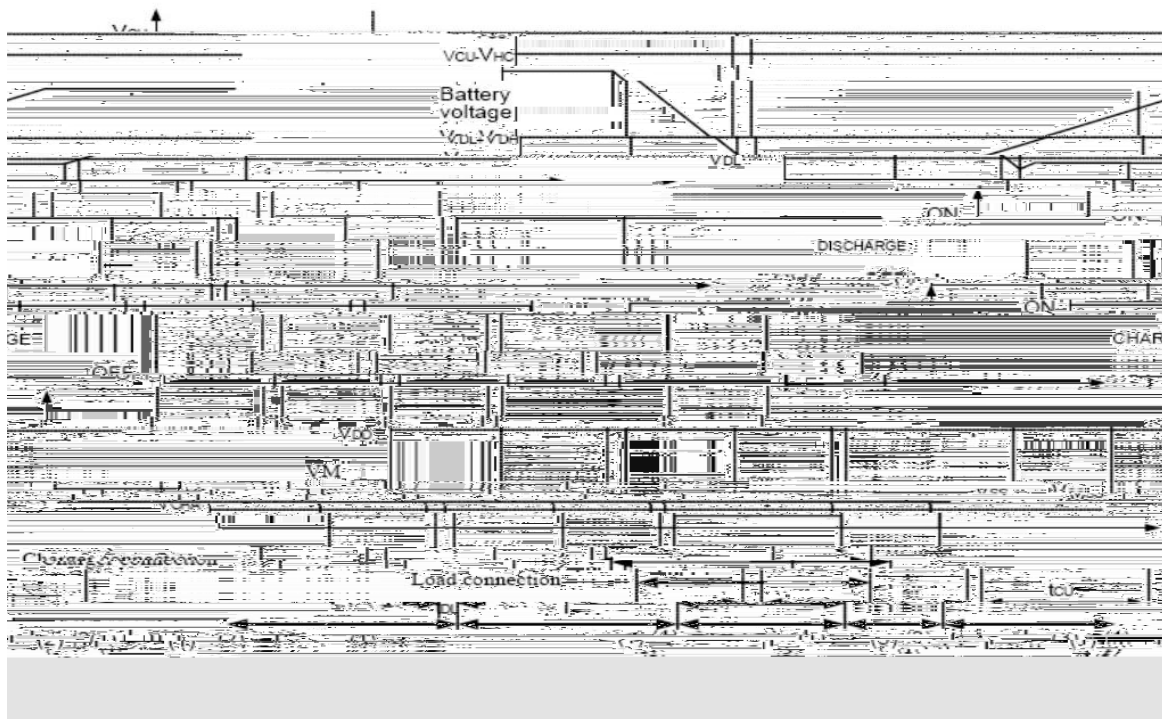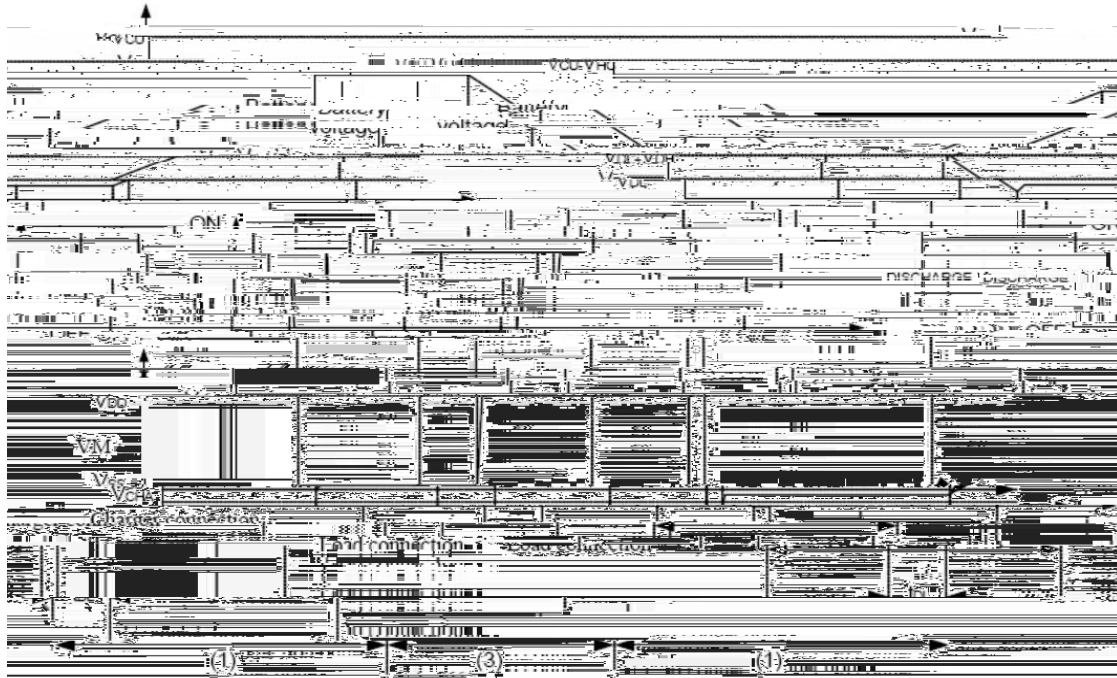

Notes: (1) Normal condition (2) Overcharge voltage condition (3) Overdischarge voltage condition (4) Overcurrent condition

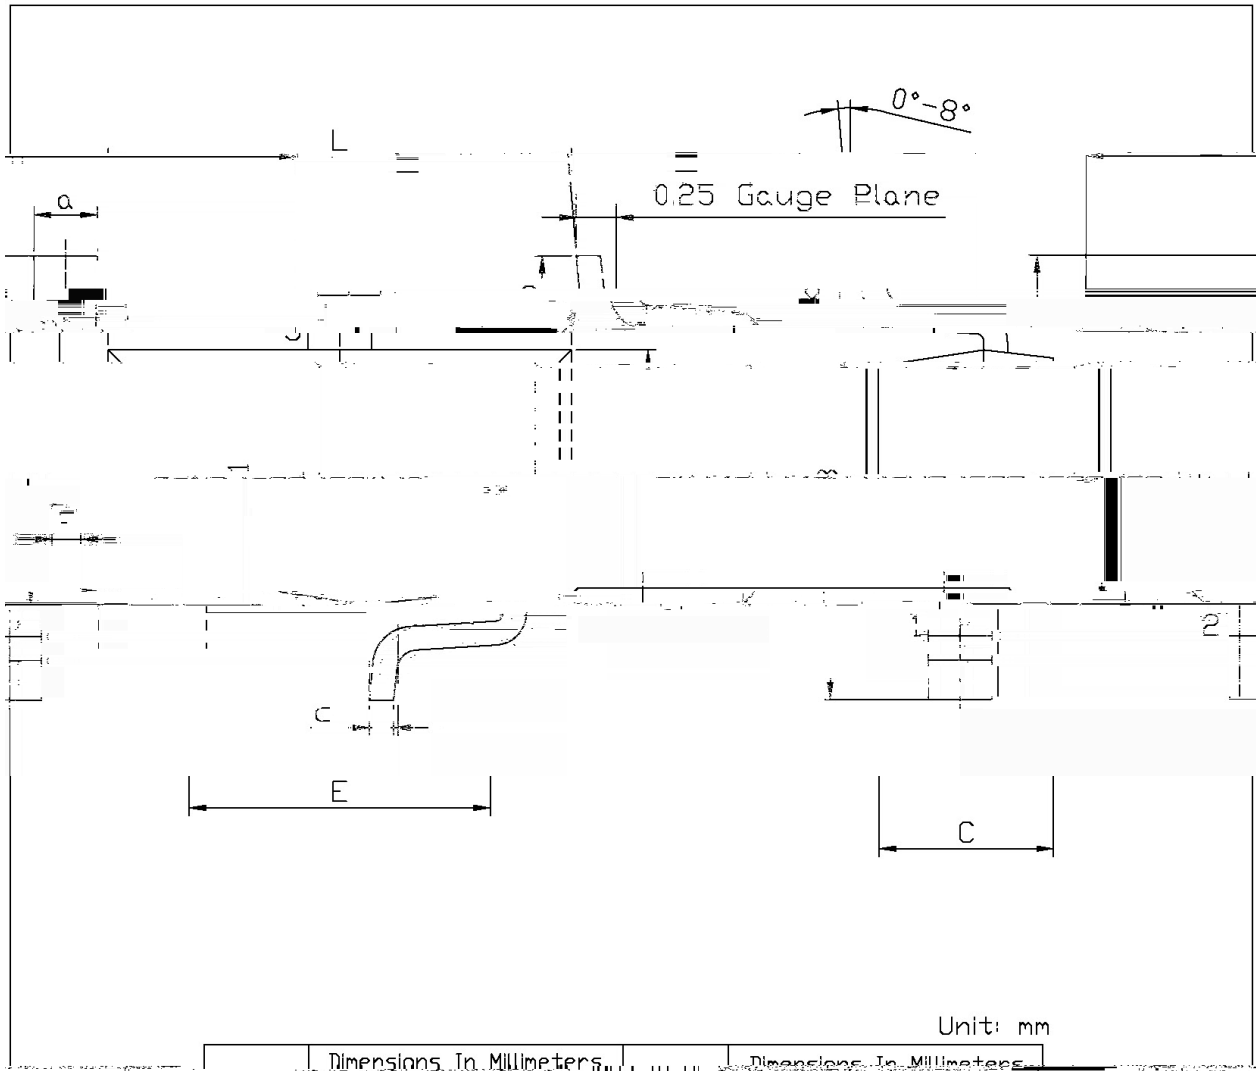

Rev. F Apr.-2021

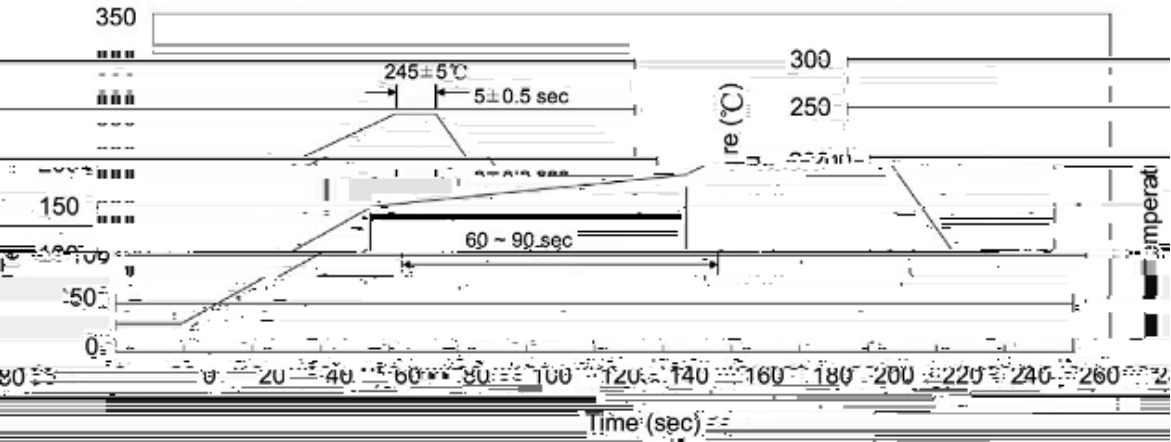

- 1

150 180

60 90sec;
- 2

245±5

5±0.5sec;
- 3

2 10°C/sec.
- Note:

1.Preheating:150~180°C, Time:60~90sec.

2.Peak Temp.:245±5°C, Duration:5±0.5sec.

3. Cooling Speed: 2~10°C/sec.

260±5°C

10±1 sec.

Temp.:260±5°C

Time:10±1 sec

/ REEL

		3
Units/Reel		