



	! " # \$	% ! " & ' (	! ") * & + ,	- .	/ 0
1	234567624		8 9 . :	; < =	> ? @
A	23476B6C	DEE	F G H I J K L M N O P Q R S T U V W X Y	Z [\	; < =
]	23236B62^	2	_ G ` a b c d e f g h i j k l m n o	; < =	

=

Ap]qB2B3A r s t u v w x y z { | y } ~ ¡ ¢ £ b b ¢ j ¥ ¦ § ¨ © ª « ¬ ® ¯ °
Ap]qB2B3A r s ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ª U

6 / 6"

I m ā

Đ4đ ã ä ¤ á L Ě ú Ô È k Ù Đ đ & Ě ē ¤ á °

Đ2đ t u Ä % Ě Ć b ¥ | ¤ Ü ¼ ě L Ů ú Ô t u Ě ē & Đ đ Ć b Ü È °

ĐBđ P è Ě j k b ¢ Á ¥ | ě Ä ¼ Ě ě Ğ è Ě ê ĝ í : Ů Ě Ğ ¼ ğ Ğ ğ Đ è Ě ê ĝ Ğ ğ b Ĥ ĥ Ħ Œ b ħ Ĩ
í î °

Notes:

- (1) The chip power consumption shall not exceed the maximum power consumed by the package.
- (2) This product has anti-



.

Parameter	Symbol	Value	Unit
V _{DD} input pin voltage	V _{IN}	-0.3 to +6	V
V _M input pin voltage	V _{VM}	-6 to +10	V
Power Dissipation	P _D	400	mW
Maximum Junction Temperature	T _J	125	°C
Lead Temperature	T _L	300	°C
Operating Junction Temperature	T _{opr}	-40 to +85	°C
Storage Temperature	T		





Table with 7 columns and 4 rows. Headers include 'Equivalent FET on Resistance', 'RDS', 'Vdd=3.6V, IVM=1A', and values 15, 25, 40, mΩ. Rows include 'Over Temperature Protection', 'Over Temperature Recovery', 'Current Detection', and 'Delay Time'.

9.210..8510..945600m65l4(0 1l4(l 0 1l62 l-65l62 l.55 l 635l4(01 l4(l 01 l62 l.62 l.55 l 001)lTJ E

!"#\$ %&
Rev.C Mar.-2020


() *) '+ , && *



/ L / .34J;3?. ' 59208059

The BRCL3230BME detects this voltage and releases the overcharge condition. Consequently, in the case that the battery voltage is equal to or lower than the overcharge detection voltage (VCU), the BRCL3230BME returns to the normal condition immediately, but in the case the battery voltage is higher than the overcharge detection voltage (VCU), the chip does not return to the normal condition until the battery voltage drops below the overcharge detection voltage (VCU) even if the load is connected. In addition, if the VM pin voltage is equal to or lower than the overcurrent 1 detection voltage when a load is connected and discharging starts, the chip does not return to the normal condition.

Note: If the battery is charged to a voltage higher than the overcharge detection voltage (VCU) and the battery voltage does not drop below the overcharge detection voltage (VCU) even when a heavy load, which causes an overcurrent, is connected, the overcurrent 1 and overcurrent 2 do not work until the battery voltage drops below the overcharge detection voltage (VCU). Since an actual battery has, however, an internal impedance of several dozens of mΩ, and the battery voltage drops immediately



/ L / .34<33.98' 59208059

ĈÆß à Ʀ t Ũ¼ ũ Ō b b Ō Ø Ð ĩ § Ð ê : & Ł Ū Ą r b ¾ Ø Ð ĩ § Ð Ō b Ō ċ À b ¾ Ū Ÿ Ʀ ũ Ū Ą
Ò ũ ř Ō Ō b Ō ċ À Ą ą Ą Ō Ą p]qB2B3A r s ũ ñ Ō b ° s»¼ Ū ū Ō b ° É ó ō Ō Ĵ æ Ō Ō b Ō ō Ō Ū ±
² Ō Ō b Ō 4¼ Ō Ō b Ō 2 Ą Ą Ą × c b Ō Ū° Ō Ō b Ō ō Ō Ū Ą r Á N ĵ ķ ŵ p Ą r ¹ b ř ĩ × Ē ³ ° ũ ĩ ź
Ą Ą Ž Ē ċ ¼ Ą r b ¾ Ø Ð Ą ķ ķ K Λ Ą Ą b ř ź & b ¾ °
ğ Ð Ą r Á N ĵ ķ Ħ Ō Ž Ē p Ą r ¹ b ř ¼ ũ Ą Ą ñ Ħ ¼ Ą r b ¾ ŵ ĩ ř Ģ b ĩ ° ũ ċ À ř Ą r b ĩ â Ð Ō Ō
4 ċ À b ¾ ¼ Ą Ą Ÿ ř ĈÆ Ħ ċ °

When the discharging current becomes equal to or higher than a specified value (the VM pin voltage is
equal to or higher than the overcurrent detection voltage) during discharging under normal condition
and the state continues for the overcurrent detection delay time or longer, the BRCL3230BME turns off
the discharging control FET to stop discharging. This condition is called overcurrent condition. (The
overcurrent includes overcurrent, or load shortcircuiting.) The VM and GND pins are shorted internally
by the RVMS resistor under the overcurrent condition. When a load is connected, the VM pin voltage
equals the VDD voltage due to the load.

Because of the connection between the VM and the GND by the RVMS resistor¼when the load is
removed, the VM pin goes back to the GND potential since the VM pin is shorted the GND pin with the
RVMS resistor. Detecting that the VM pin potential is lower than the overcurrent detection voltage
(VIOV1), the IC returns to the normal condition.

/) D953F ;:-' J ;3?.' <33.98' (.8.48059

ĈÆĒ b Ą ¼ Ĵ ř Ą r b ¾ § ř Ē b Ą b ¾ Ō Ū ċ]B1đ ¼ Ÿ Ʀ ũ Ū Ą Ō Ō Ō Ē b Ō Ą Ą Ą Ō
ċ»] ū đ¼ Ą p]q ũ ñ Ē b ° s»¼ Ū ū Ē b ° É ó ō Ō Ĵ æ ŠÆĒ b b Ō Ą Ą °
ñ Ħ Ē b ĩ ¼ Ą r Á N ĵ ķ Ħ Ō b ¾ § Ð Ē b ĩ ċ À b ¾ ċ]B1đ Ą ŠÆĒ b b Ō Ʀ t « ŷ ° ġ Ð 3 Ą b □
Ē b ¶ Ū M ´ N § Ð L ĈÆ b Ō Ē b ċ À ¼ b □ b ¾ ≡ â & b □ Ĉ P μ Ž 3 Ą Ē b Ą ¼ ŠÆĒ b b Ō ċ À
Ţ L ß à °

If the VM pin voltage drops below the charger detection voltage (VCHA) during charging under the
normal condition and it continues for the overcharge detection delay time (TCU) or longer, the
BRCL3230BME turns the charging control FET off and stops charging. This action is called abnormal
charge current detection.

Abnormal charge current detection is leased when the voltage difference between VM pin and GND
pin becomes higher than the charger detection voltage (VCHA) by separating the charger. Since the 0
V battery charging function has higher priority than the abnormal charge current detection function,
abnormal charge current may not be detected by the product with the 0 V battery charging function
while the battery voltage is low.

/ !5;2'+J538P4034<0809?' 59208059


Ĵ ř Ą r b ¾ § Ð × c ¥ ĩ b ¾ Ū Ą ¹ B , p»Ū¼ Ÿ Ʀ ũ Ū Ą Ō ū Ō × c ċ À Ą ą Ą Ō Ū ĩ ¹ B , p»Ū¼
Ą p]qŢ Ē Ą Ą Ą Ą Ą Ţ Ō

0V / \$R' ;88.3@' J;3?09?':<948059

P ¶ Ü a Ð Σ æ T ‡ Ö b ř 3A& b µ Ž Y £ b ° ü £ b Í Φ ž Ā¼Ń Ń Ō + ð á Ą š † I b µ µ Ž £
b ¼ ũ b µ b ¾ § Ð Ō Ō b ¿ À b ¾ Ū A k q Ŭ Ā ¼ ¥ † A ¶ µ Z Ĉ Æ ß à Γ ć °
I ā 4 d X Ψ Ω Ĩ ‡ Ö b Ž & b µ ¼ L Ÿ á ŵ Y 9 £ b ¼ É v ġ y b µ & Q é ¬ : & ° Ě ģ í b µ ñ ` Ů ¼
ě Ğ Û α β & b µ v γ Ä ĝ ð Ÿ á ø 3A b µ £ b ε & ¶ Ü ¼ ζ ν δ η υ ø 3A b µ £ b ε & ¶ Ü °
Đ 2 đ ð Ÿ á ø 3A b µ £ b ¶ Ü ε θ ð £ b Ō Ō ¿ À ¶ Ü ε M ´ N Ů § ° η P 0 Ê a ð Ÿ á ø 3A b µ £ b ε
¶ Ü & A ¶ ¼ P b µ b ¾ ĩ â & Ā κ Ń λ . £ b ° b µ b ¾ â Ð Ō Ō b ¿ À b ¾ Ū A k q Ŭ Ō Ŭ Ā ¼ L Ŭ µ
Ž £ b Ō Ō Γ ć & ¿ À °
Đ B đ ũ b µ í 9 E ž ¥ † b c Ā ¼ É ž b c ¢ Ŭ L Ń µ Z Ĉ Æ † ‡ ¼ P Ā V v Ō b ° R ģ † Á É ó ξ o ¼
Š A r š Ĩ b ¾ Ø Đ N j k b ¾

/ * 0 F 0 9 ? ' J ; 3 8

/ L / . 3 4 J ; 3 ? . ') 9 2 ' L / . 3 2 0 1 4 J ; 3 ? . ' (. 8 . 4 8 0 5 9

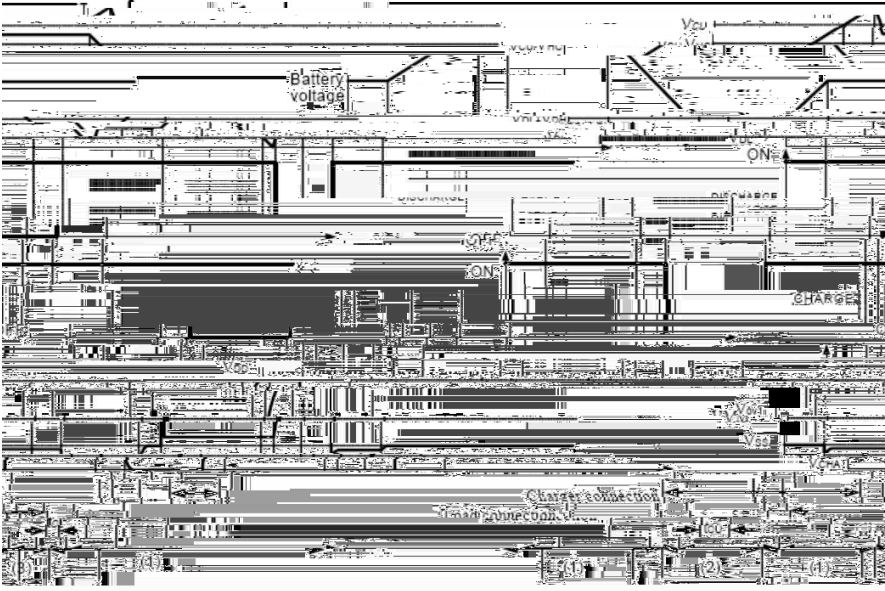

注：（1） 正常情况 （2） 过充电压情况 （3） 过放电压情况

/ Overcharge L / . 3 2 0 1 4 J ; 3 ? . ' < 3 3 . 9 8 ' (. 8 . 4 8 0 5 9




注：（1） 正常情况 （2） 过充电流状态 （3） 过放电流状态



/ * 0 F 0 9 ? ' J ; 3 8


/ J ; 3 ? . 3 ' (. 8 . 4 8 0 5 9

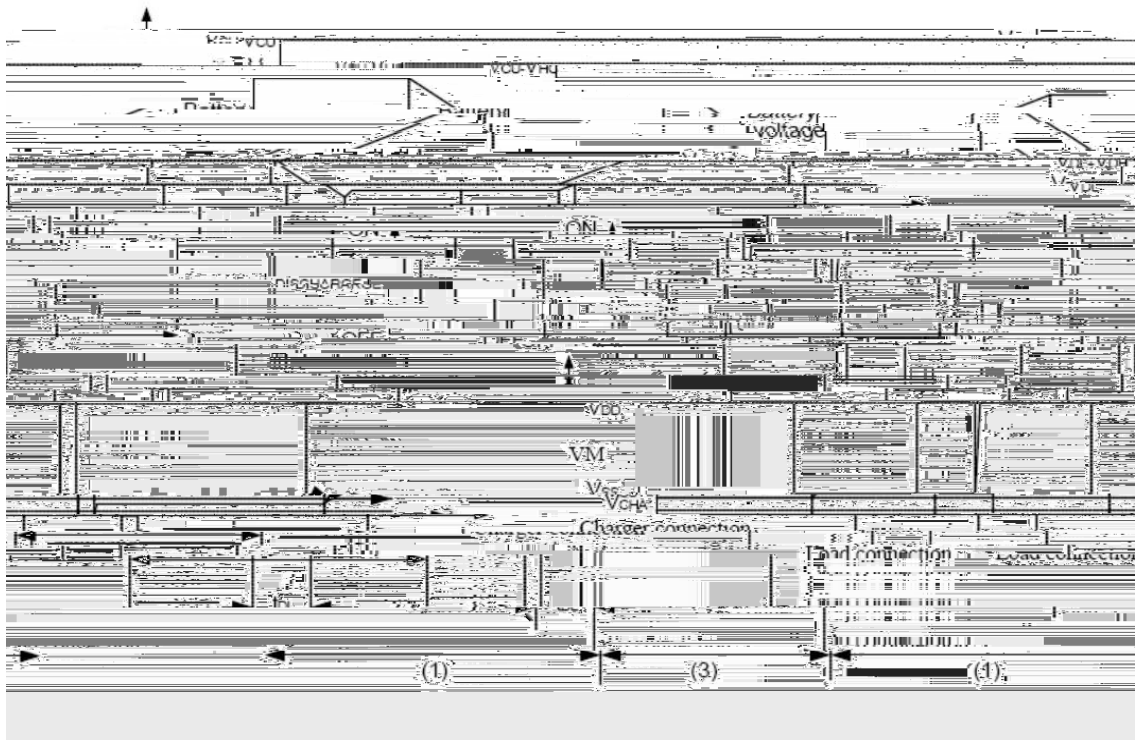

!"#\$ %&
Rev.C Mar.-2020

() *) ' + , & & *

' ' . ' % ; 3 > 0 9 ? ' T 9 1 8 3 < 4 8 0 5 9 1 '

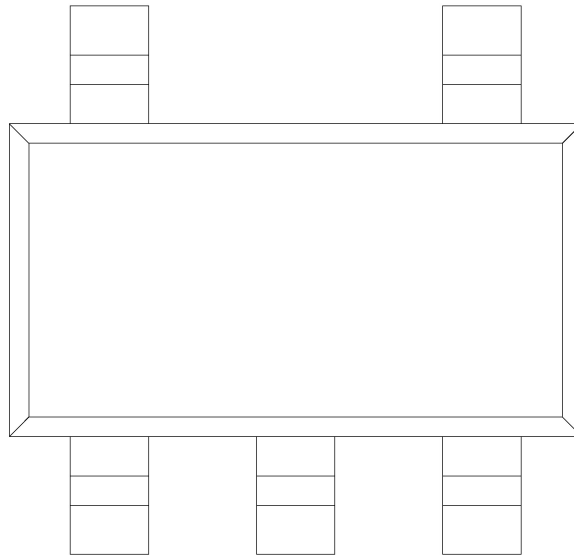

ĵ Ȳ ā

B2B3A ā

æ t u G H

ππππ ā


æ Á t ρ H ζ (¼ σ Á t ρ H τ υ

Note:

3230B:

Product m3s

Temperature Profile for IR Reflow Soldering(Pb-Free)

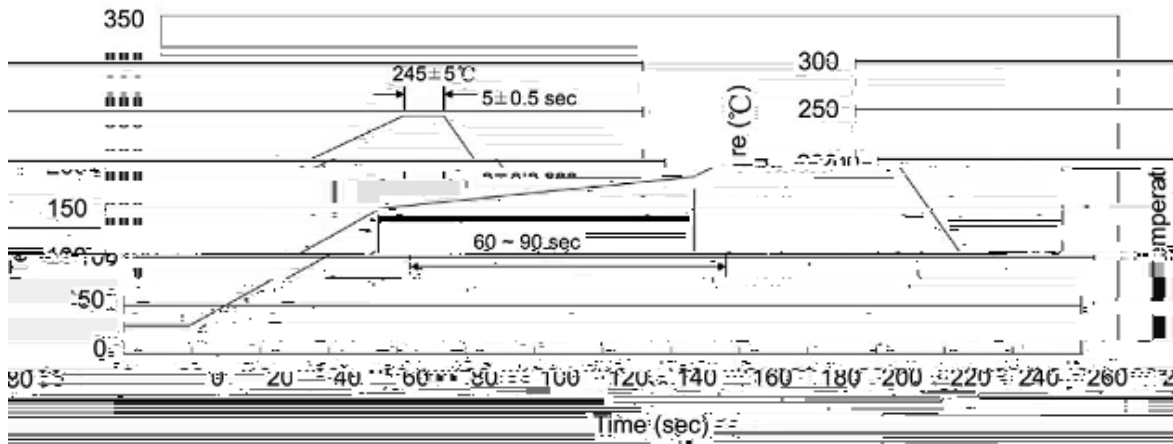

1. Preheating: 150~180°C, Time: 60~90sec;
 2. Peak Temp.: 245±5°C, Duration: 5±0.5sec;
 3. Cooling Speed: 2~10°C/sec.

- Note:
 1. Preheating: 150~180°C, Time: 60~90sec.
 2. Peak Temp.: 245±5°C, Duration: 5±0.5sec.
 3. Cooling Speed: 2~10°C/sec.

1018; 94.85'±5.2.309', .; 8'.18' 592080591'

Temp.: 260±5°C Time: 10±1 sec.

A; 4>; ?09?' + A& U'

REEL

Package Type	Units			Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Boxes	Units/Outer Box	
	/	/	/	/	/	