


Pinning

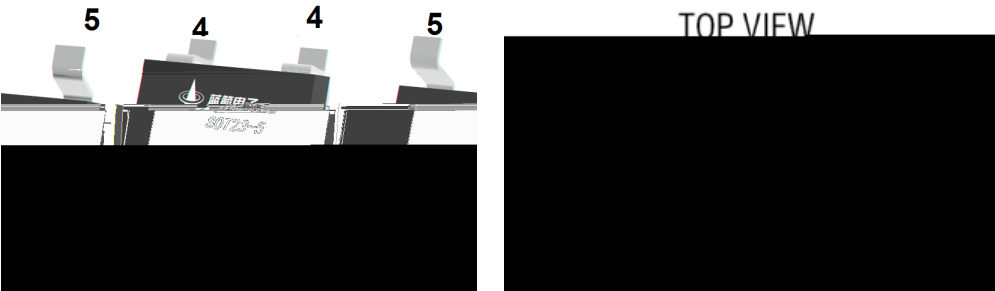

PIN Num.	Symbol	Function
	PROG	

Absolute Maximum Ratings(Ta=25)

PARAMETER	SYMBOL	RATINGS	UNITS
	R _{θJA}		

Electrical Characteristics(Ta=25)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
						μ
						μ

μ

13A




PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
						mS
						mS
						μ

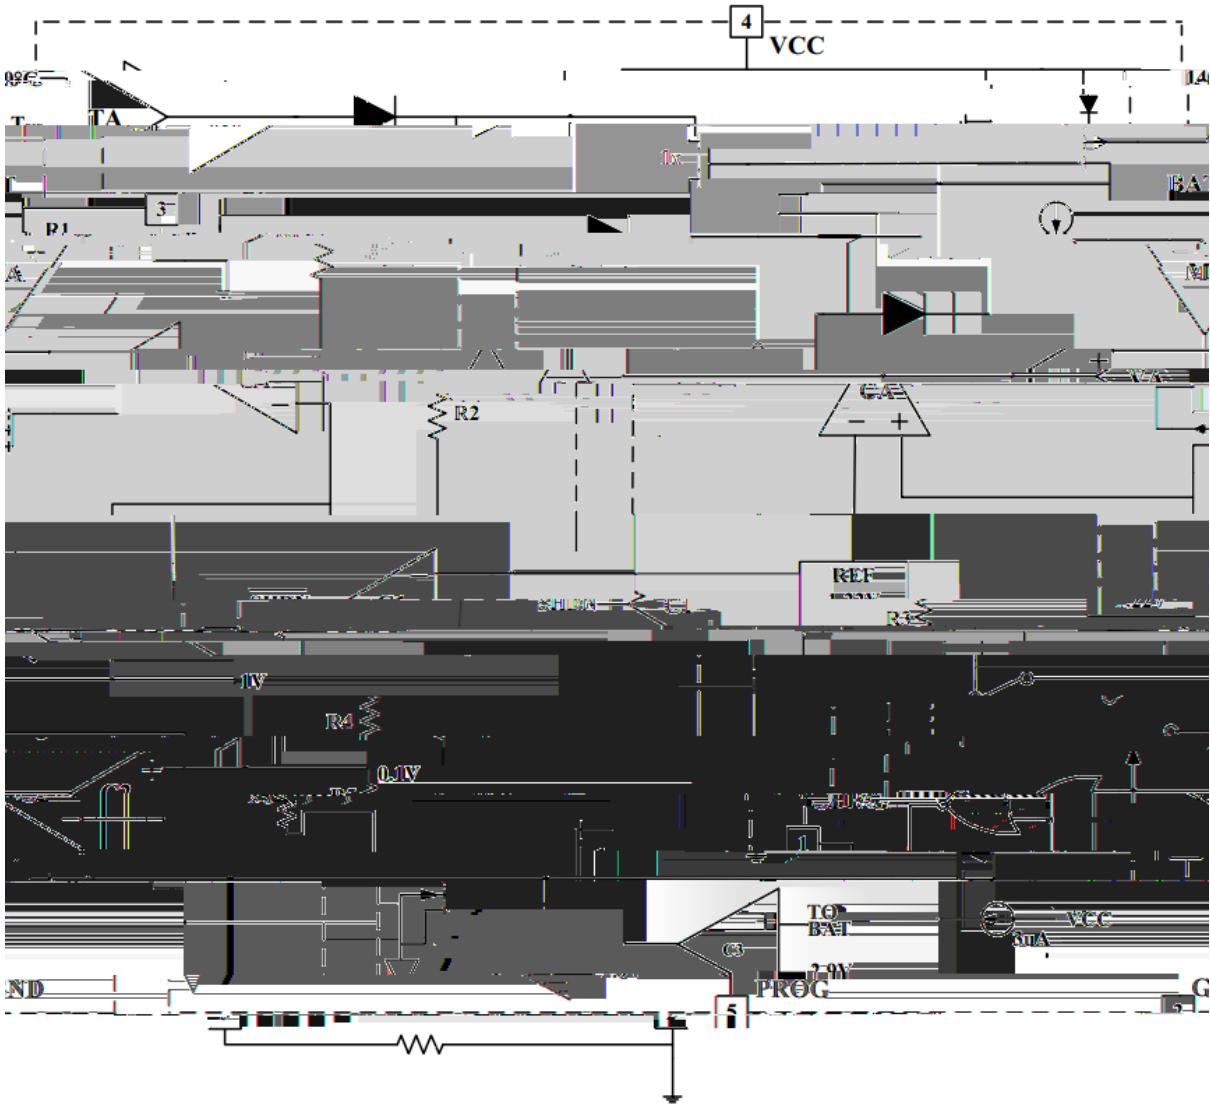


h 1"Y

4. 符号 / Marking Instructions

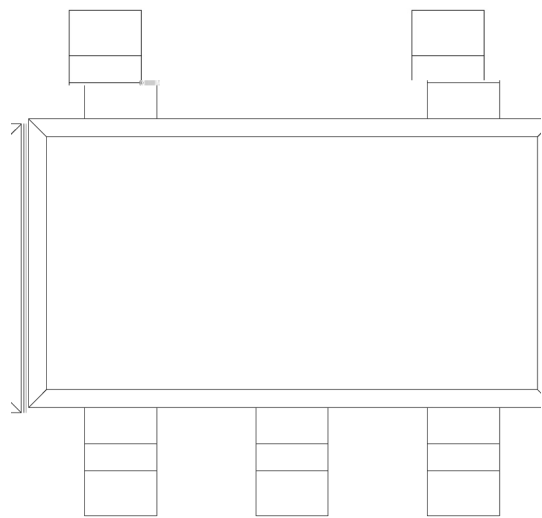

4058M

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

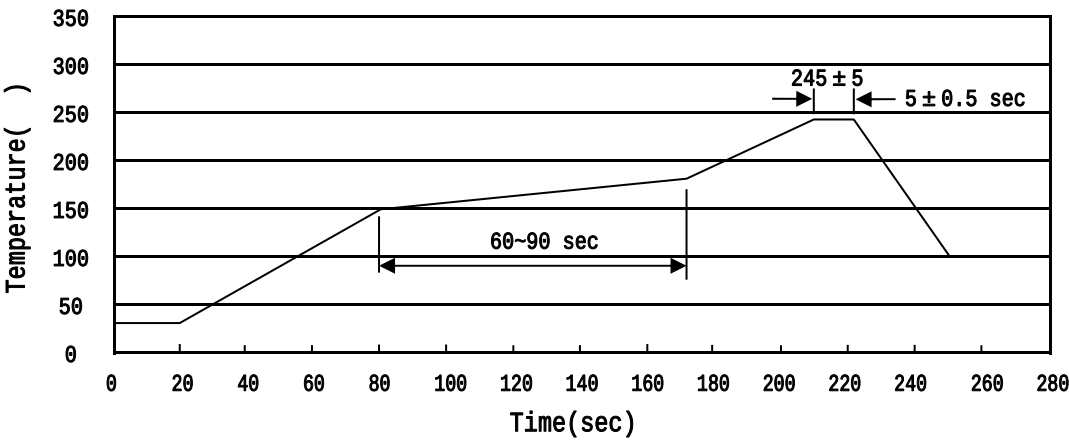

± ± ± ±

Resistance to Soldering Heat Test Conditions

± ±

Packaging SPEC.

						Ж		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

Notices