


BRCS030N03ZC


Rev.C Sep.-2022



PDFN5×6 N
N-Channel MOSFET in a PDFN5×6 Plastic Package .


Low $R_{DS(ON)}$ to minimize conductive loss;low Gate Charge for fast switching;Low Thermal resistance;HF Product.

N




Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

Drain-SouD





Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$			9		
Turn-On Rise Time	t_r	$V_{GS}=10V$ $R_L=0.75\ \Omega$		$V_{DS}=15V$ $R_{GEN}=3\ \Omega$		ns

/ Electrical Characteristic Curve

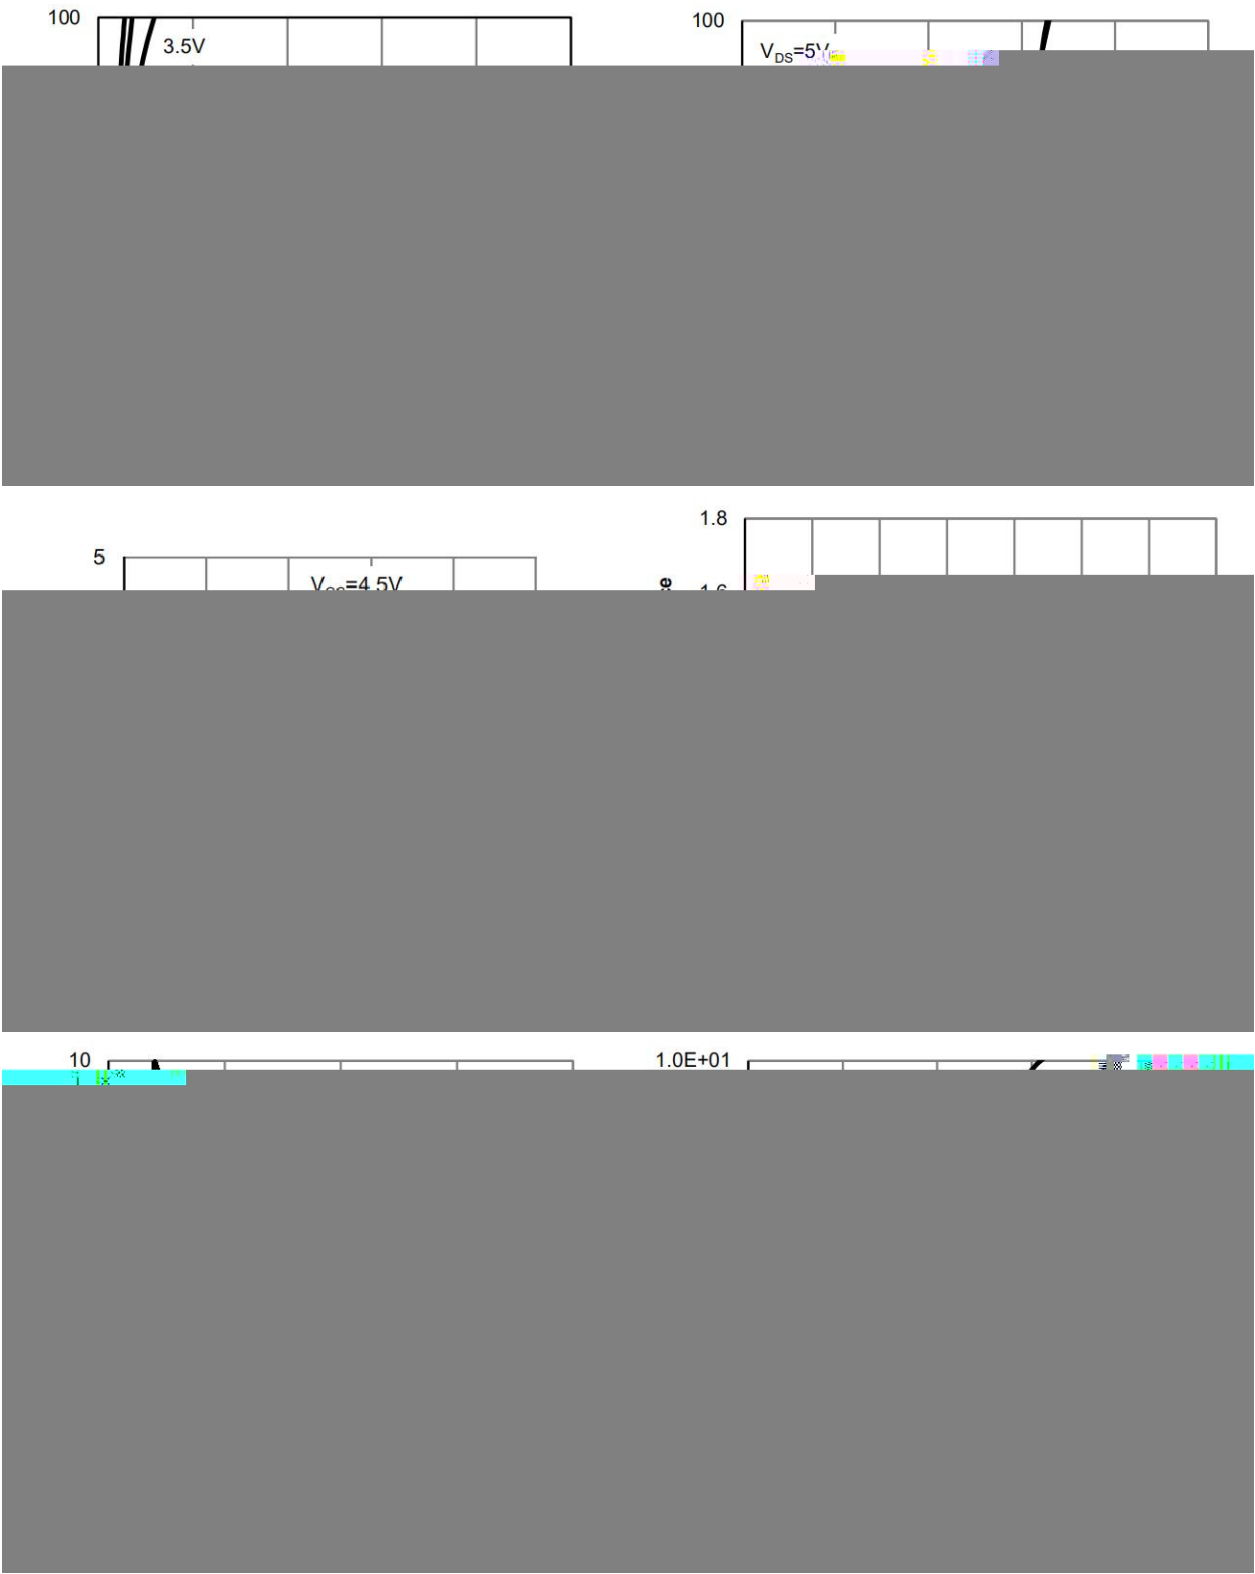

/ Electrical Characteristic Curve

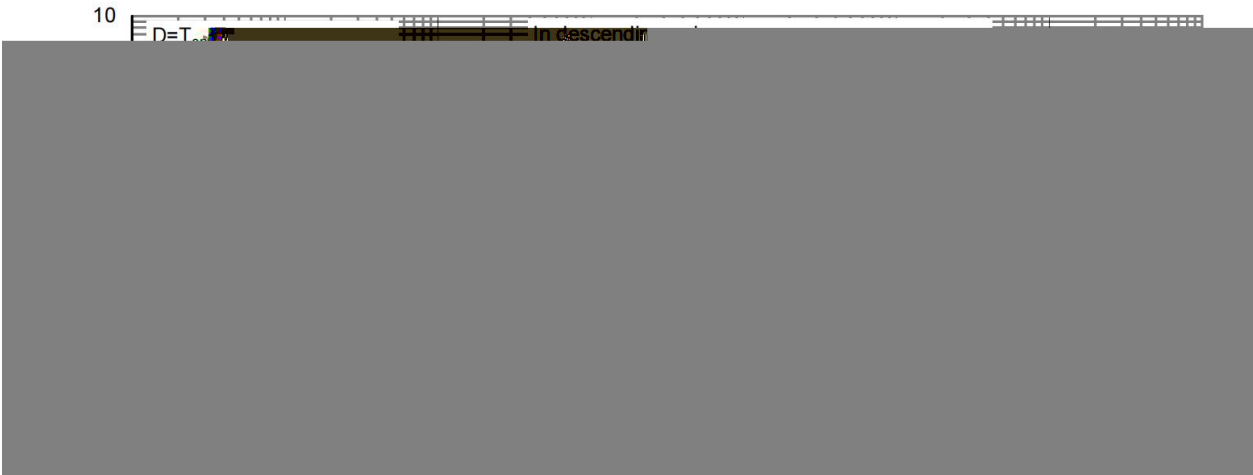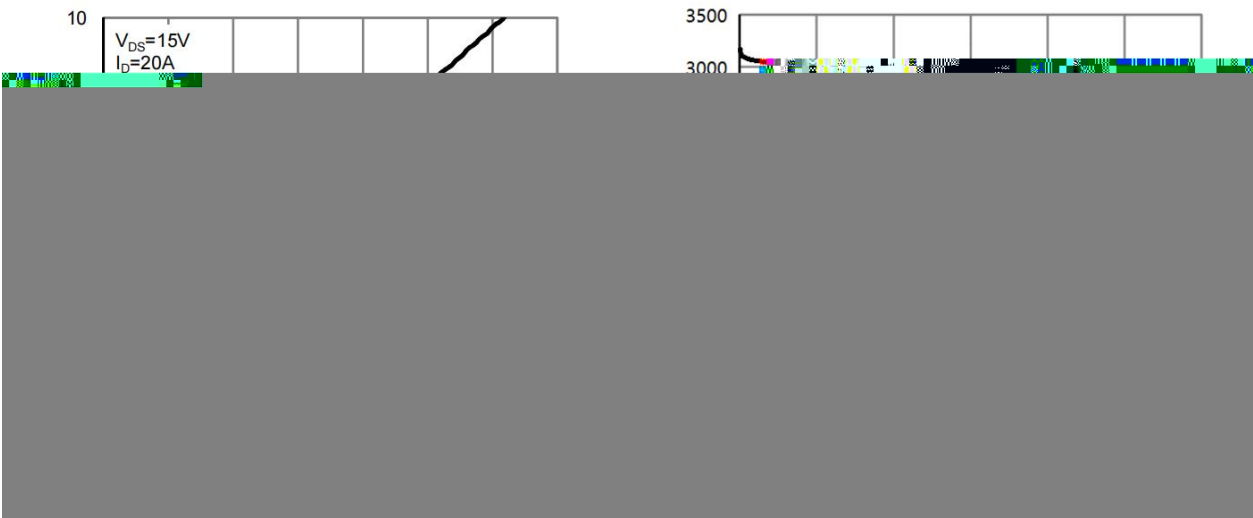


/ Package Dimensions



Doc 00, 201012.....

/ Marking Instructions

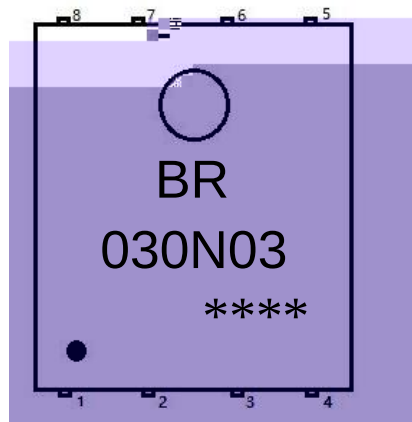

BR

030N03

Note

BR

Company Code

030N03

Product Type

****;

Lot No. Code, code change with Lot No

