



TO-252 N
N-CHANNEL MOSFET in a TO-252 Plastic Package.

$R_{DS(on)}$ C_{rss}
Low $R_{DS(on)}$, low gate charge, low C_{rss} , fast switching, Halogen-free Product.





DC/DC



Suited for low voltage applications such as automotive, DC/DC Converters, and high efficiency switching for power management in portable and battery operated products.








PIN1 G PIN 2 D PIN 3 S PIN 4 D

See Marking Instructions.

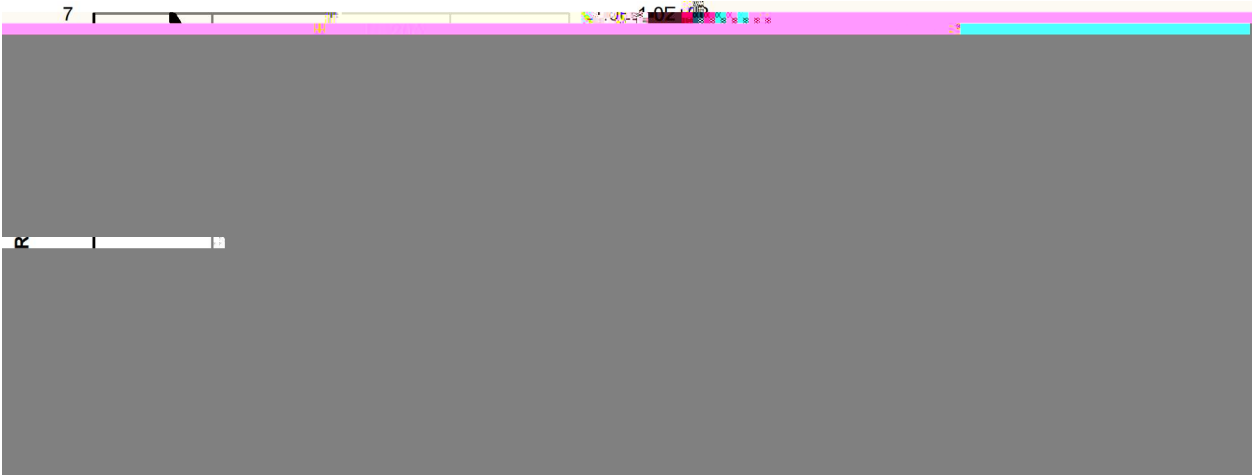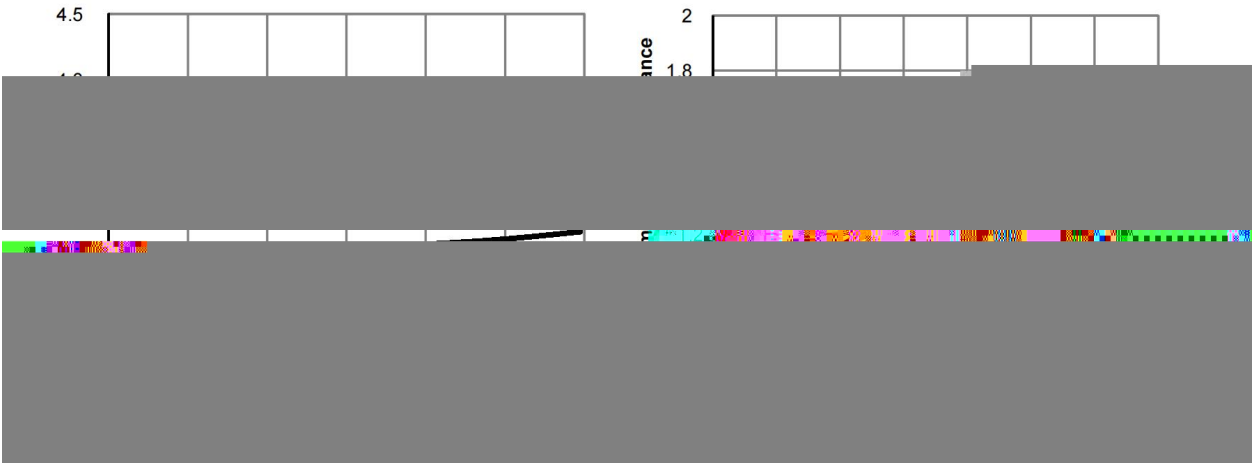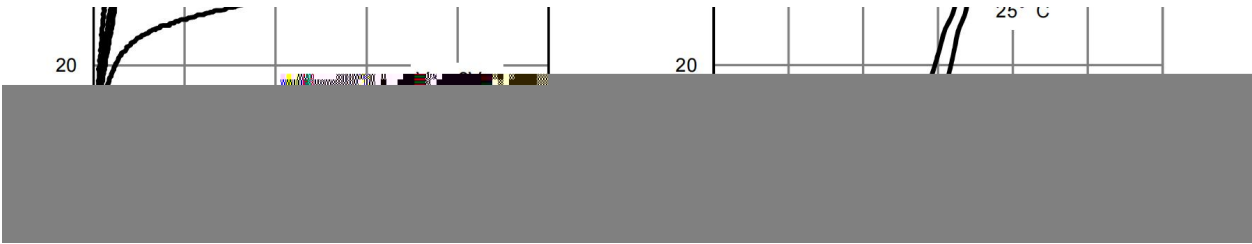

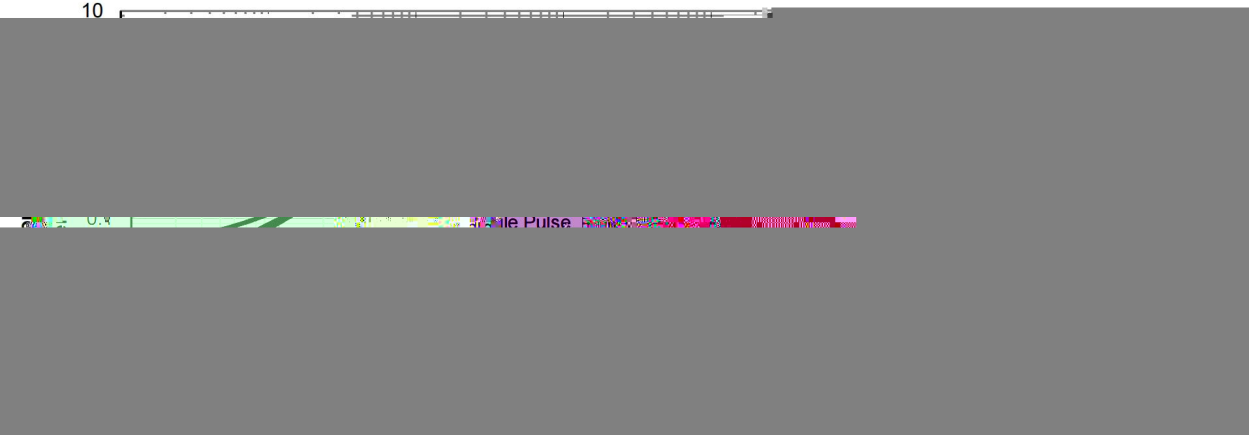

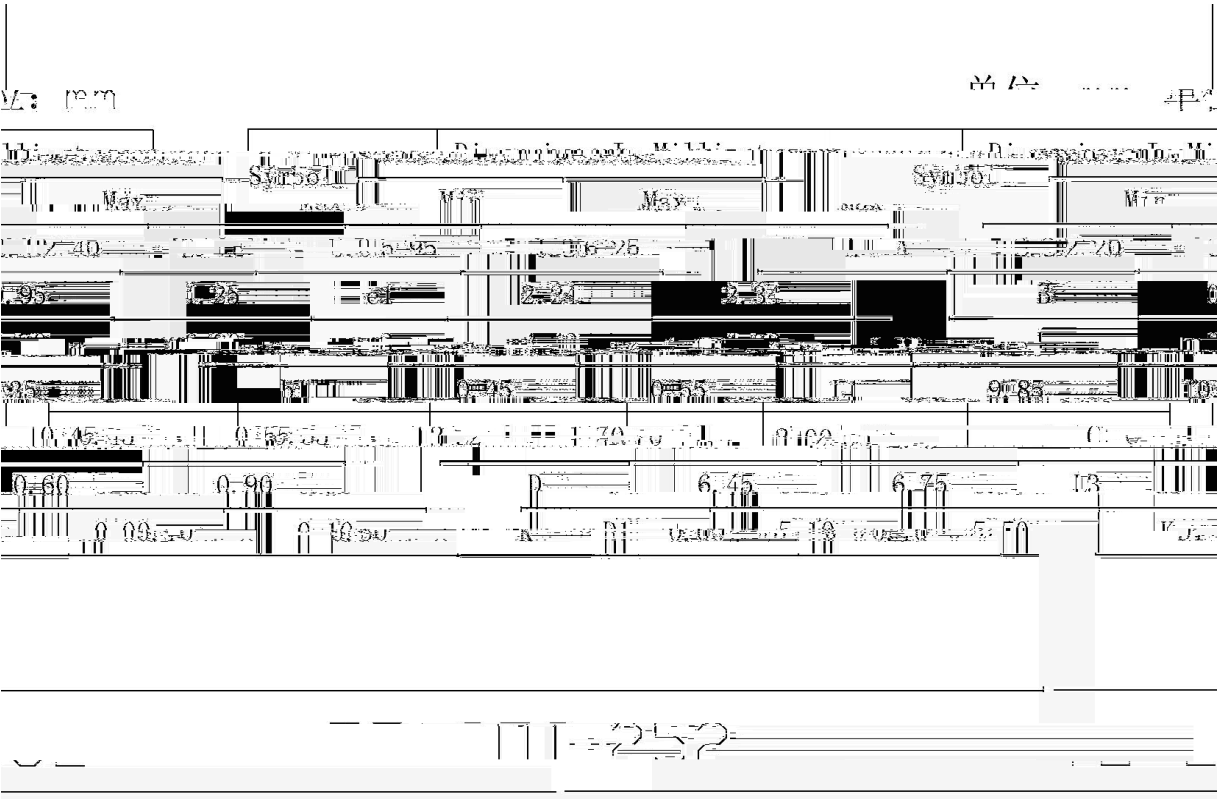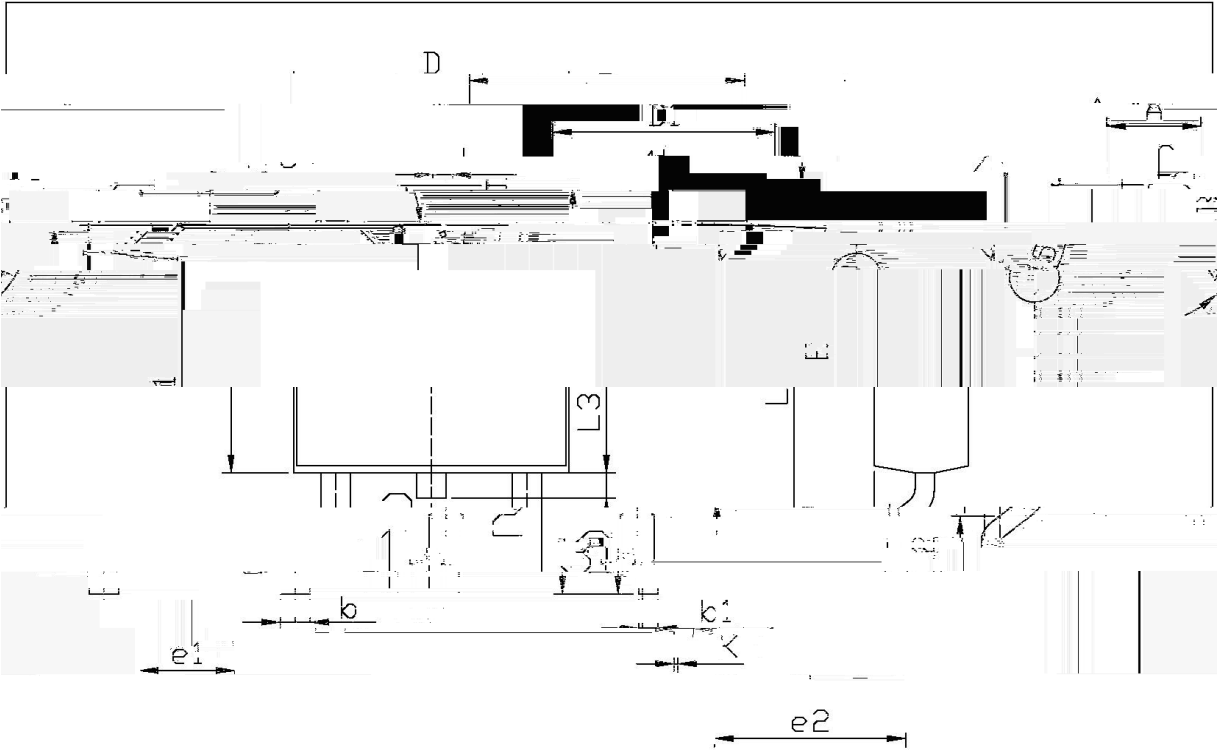

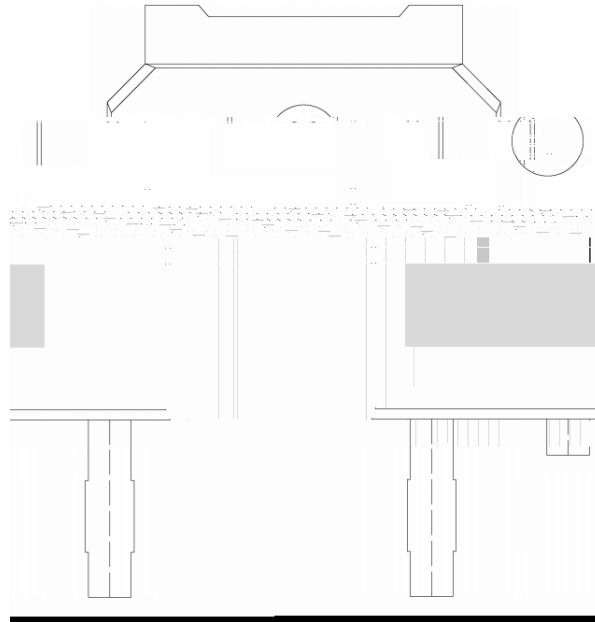

说明：

BR： 为公司代码


035N06S： 为型号代码

****：R 为生产批号代码，随生产批号变化。


Note:

BR: R Company Code

035N06S: Product Type Code.



Temperature Profile for IR Reflow Soldering(Pb-Free)

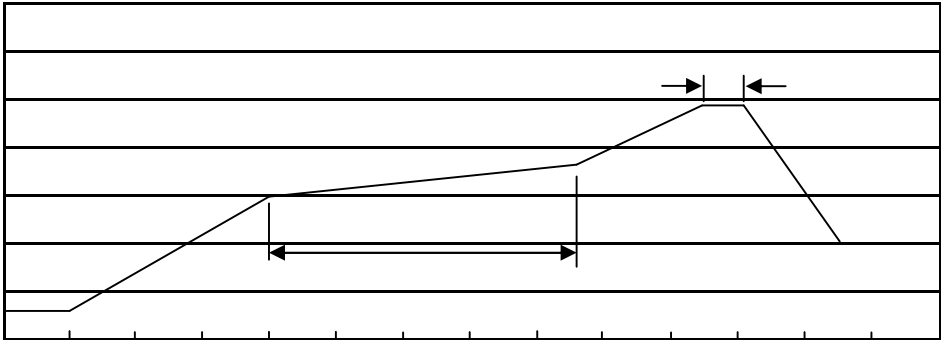

Note:

- 1

150 180

60 90sec;
- 2

245 5

5 0.5sec;
- 3

2 10

/sec.
- 1.Preheating:150~180

,

Time:60~90sec.
- 2.Peak Temp.:245 5

,

Duration:5 0.5sec.
3. Cooling Speed: 2~10

/sec.

260 5

10 1 sec.

Temp.:260±5℃

Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
							盒	箱
						"		

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
						套管	盒	箱