

BRDTC143EKAQ



DATA SHEET

95 143EKAQ

6


1. Absolute Maximum Ratings(Ta=25℃ ;)

Symbol	Parameter	Unit	Value


2. Electrical Characteristics(Ta=25℃ ;)

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit


〇 ? d • Ž ¢ / Electrical Characteristic Curve

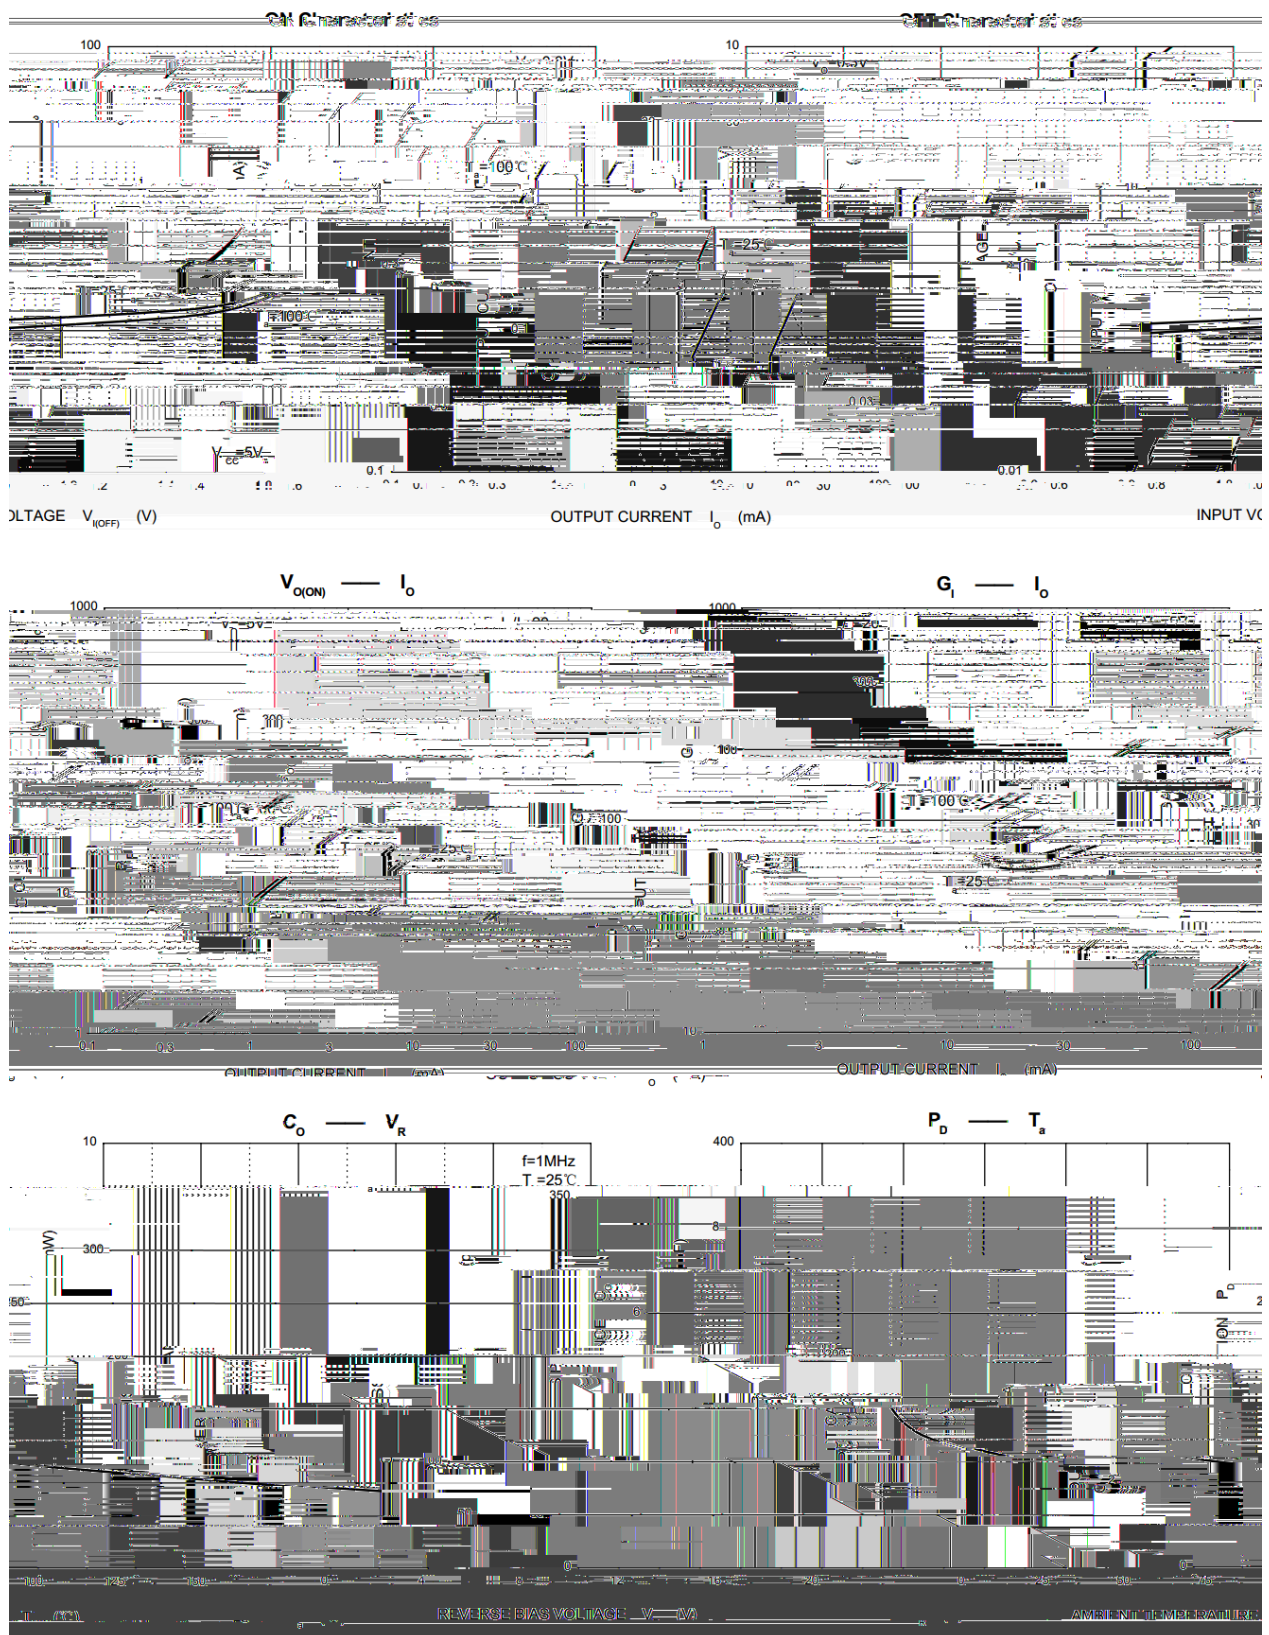

BRDTC143EKAQ



šWD t...•Ž¢ (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

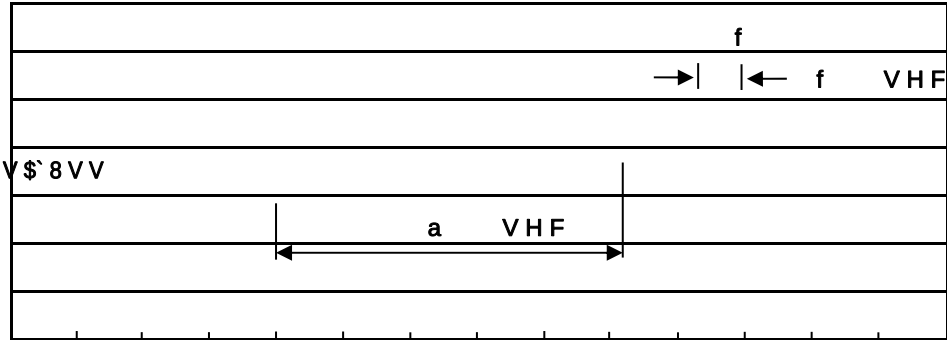

ψ
Ω Ω -
r r - r
Ω -

ÂD /Cã p ¯ »] / Resistance to Soldering Heat Test Conditions

ŷ r - ŷ r

G P á / Packaging SPEC.

⌘

7>û ~ E	; > û H					; > û p . Æ		
	Units/Reel / --	Reels/Inner Box -- / -	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Boxç
						T		

„Đ y f / Notices