

BRESD5V0X1C2Z**PQ**

Rev.C Aug.-2025

BRES5V0X1C2ZPQ

Rev.C Aug.-2025





蓝箭电子
BLUE ROCKET ELECTRONICS


DATA SHEET

Parameter	Symbol	Rating	Unit
Peak Pulse Power($t_p = 8/20\mu s$)	P_{PK}	56	W
Peak Pulse Current($t_p = 8/20\mu s$)	I_{PP}	4	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 20	KV
ESD according to IEC61000-4-2 contact discharge		± 20	

/ Electrical Characteristic Curve(Ta=25)

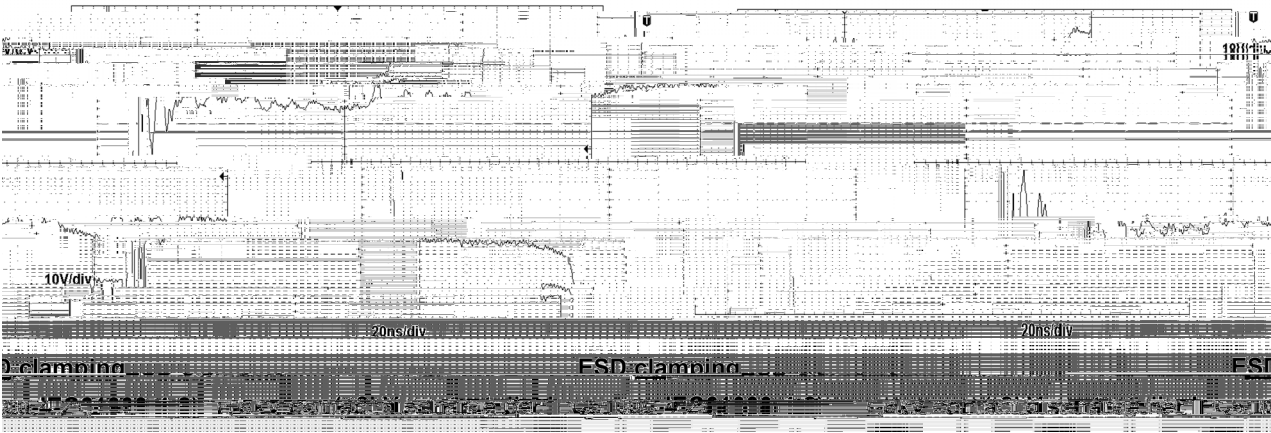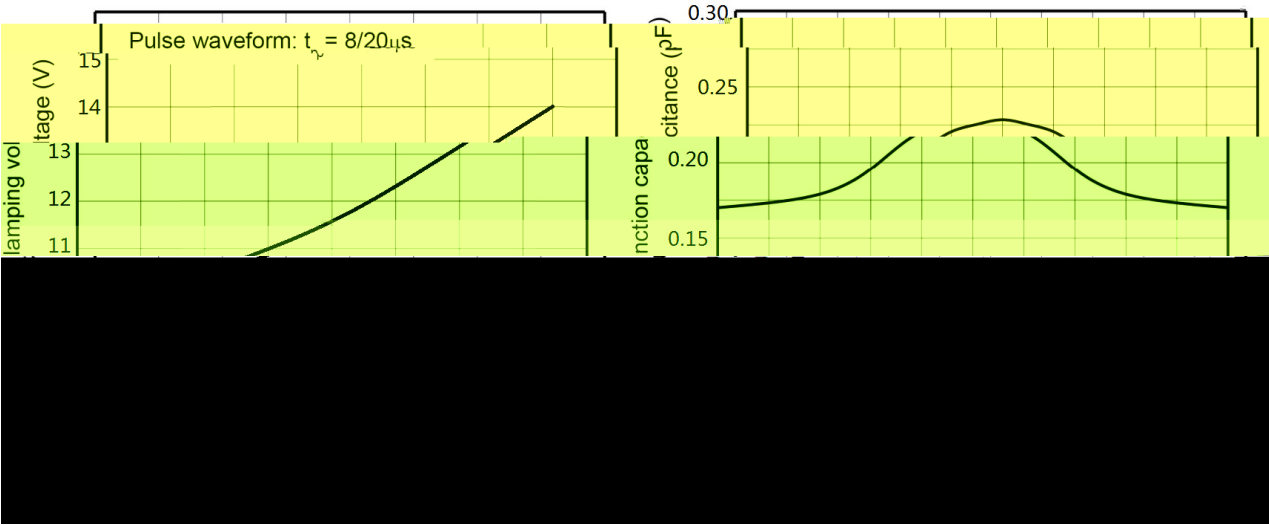


/ Package Dimensions

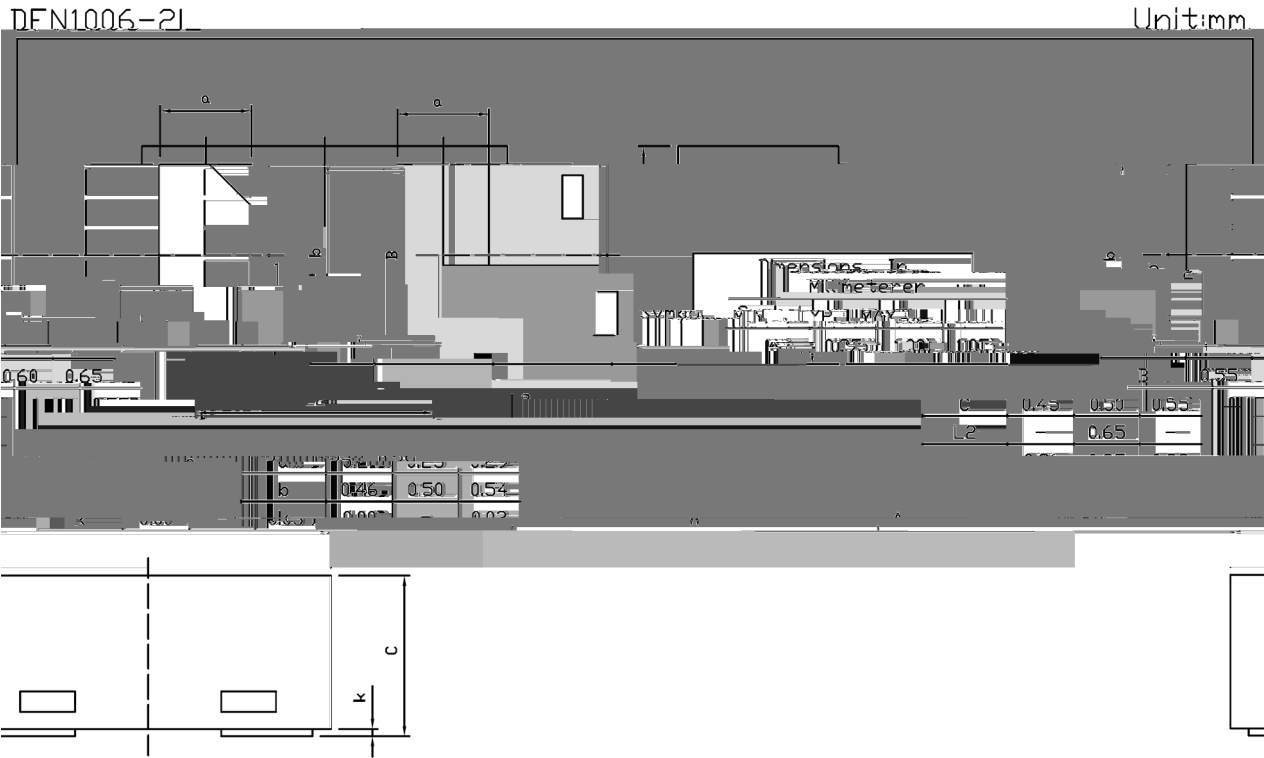

Rev.01 202108

/ Marking Instructions

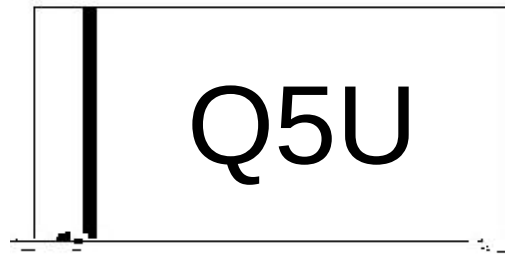

Q


5U

Note

Q Automobile halogen-free product Code

5U Product Type

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

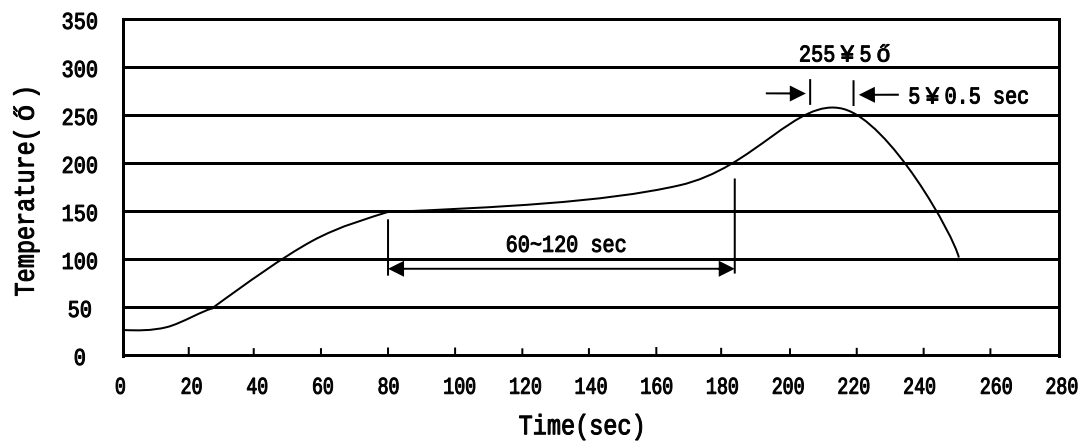

Note:

- 1

150 200

60 120sec;

1.Preheating:150~200 , Time:60~120sec.
- 2

255±5

5±0.5sec;

2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
DFN1006-2L	10,000	10	100,000	6	600,000	7 ×8	180×120×180	390×385×205

/ Notices