



! / Revised record

A

A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A

A


A

A


ES3AC~ES3JC

ES3AC

0 8 9 = > ? / Electrical Characteristic Curve

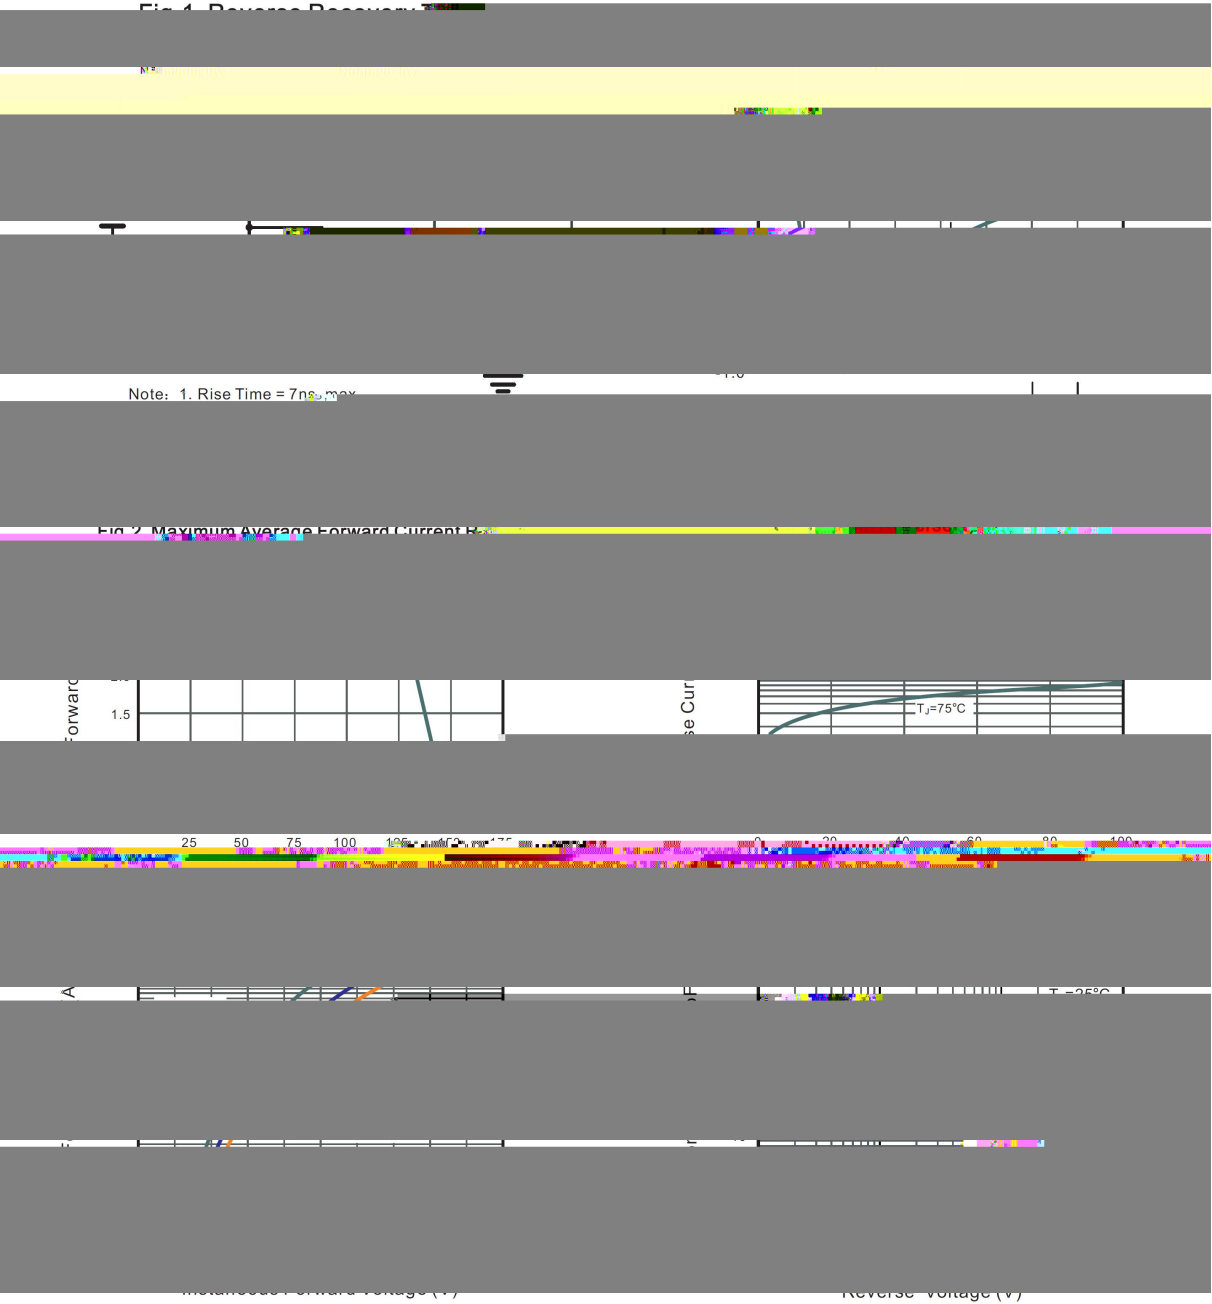

@ A B C ? / Package Dimensions

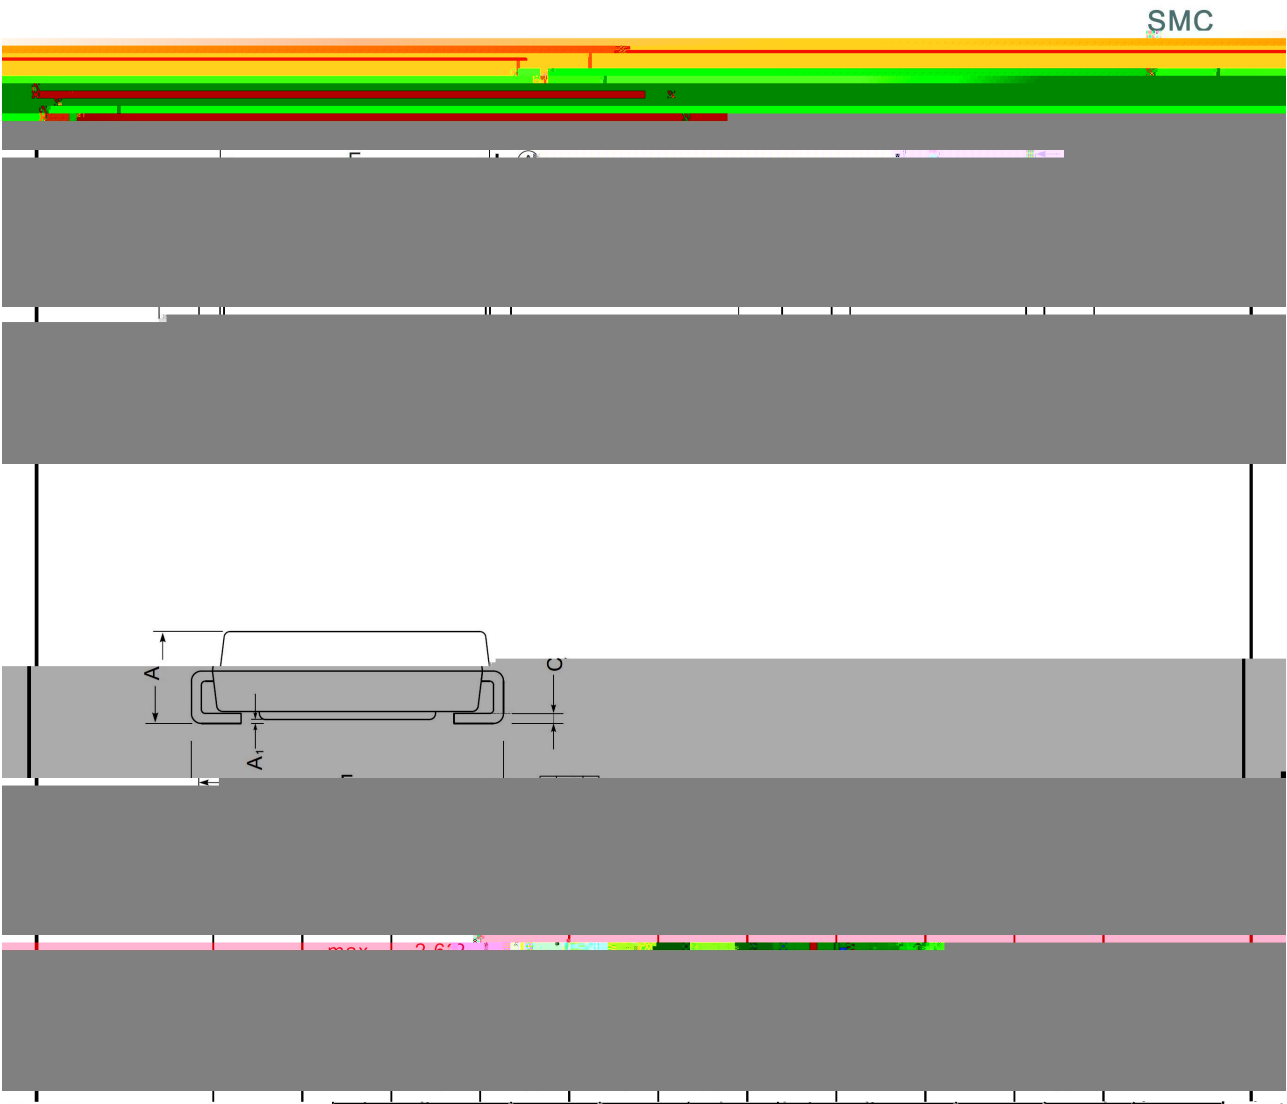



" # D E / Marking Instructions

Marking



" # D E / Marking Instructions



ES3A

1 F

3 F


Note:

ES3A Product Type Code

**** Lot No. Code The 1st F means:YM Code The last 3 F means:little Lot No Code



H I J K L = > ? (M N) / O P Q R P S T U V S P G W S X Y Z [P G Y X S G \] G] P Y [X ^ G _ X [` P S Z a b c W d e f S P P g

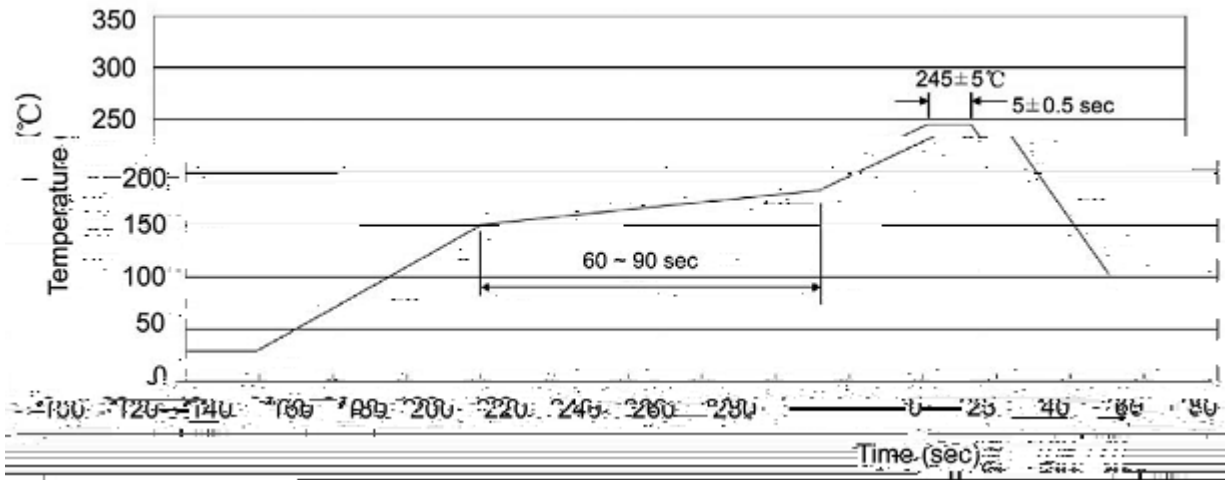

Note:

- 1 25 150 60 90sec;
- 2 245±5 5±0.5sec;
- 3 2 10°C/sec.

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed