

Rev.D May.-2017

1.2A

ABF

1.2A Surface Mount Glass Passivated Bridge Rectifier, ABF thin package.

1000V


1.2A


Glass Passivated Chip Junction, Reverse Voltage: 1000V, Forward Current: 1.2A, Fast reverse recovery time, Designed for Surface Mount Application. Halogen free product.

General purpose.

Rev.D May.-2017


Rev.D May.-2017

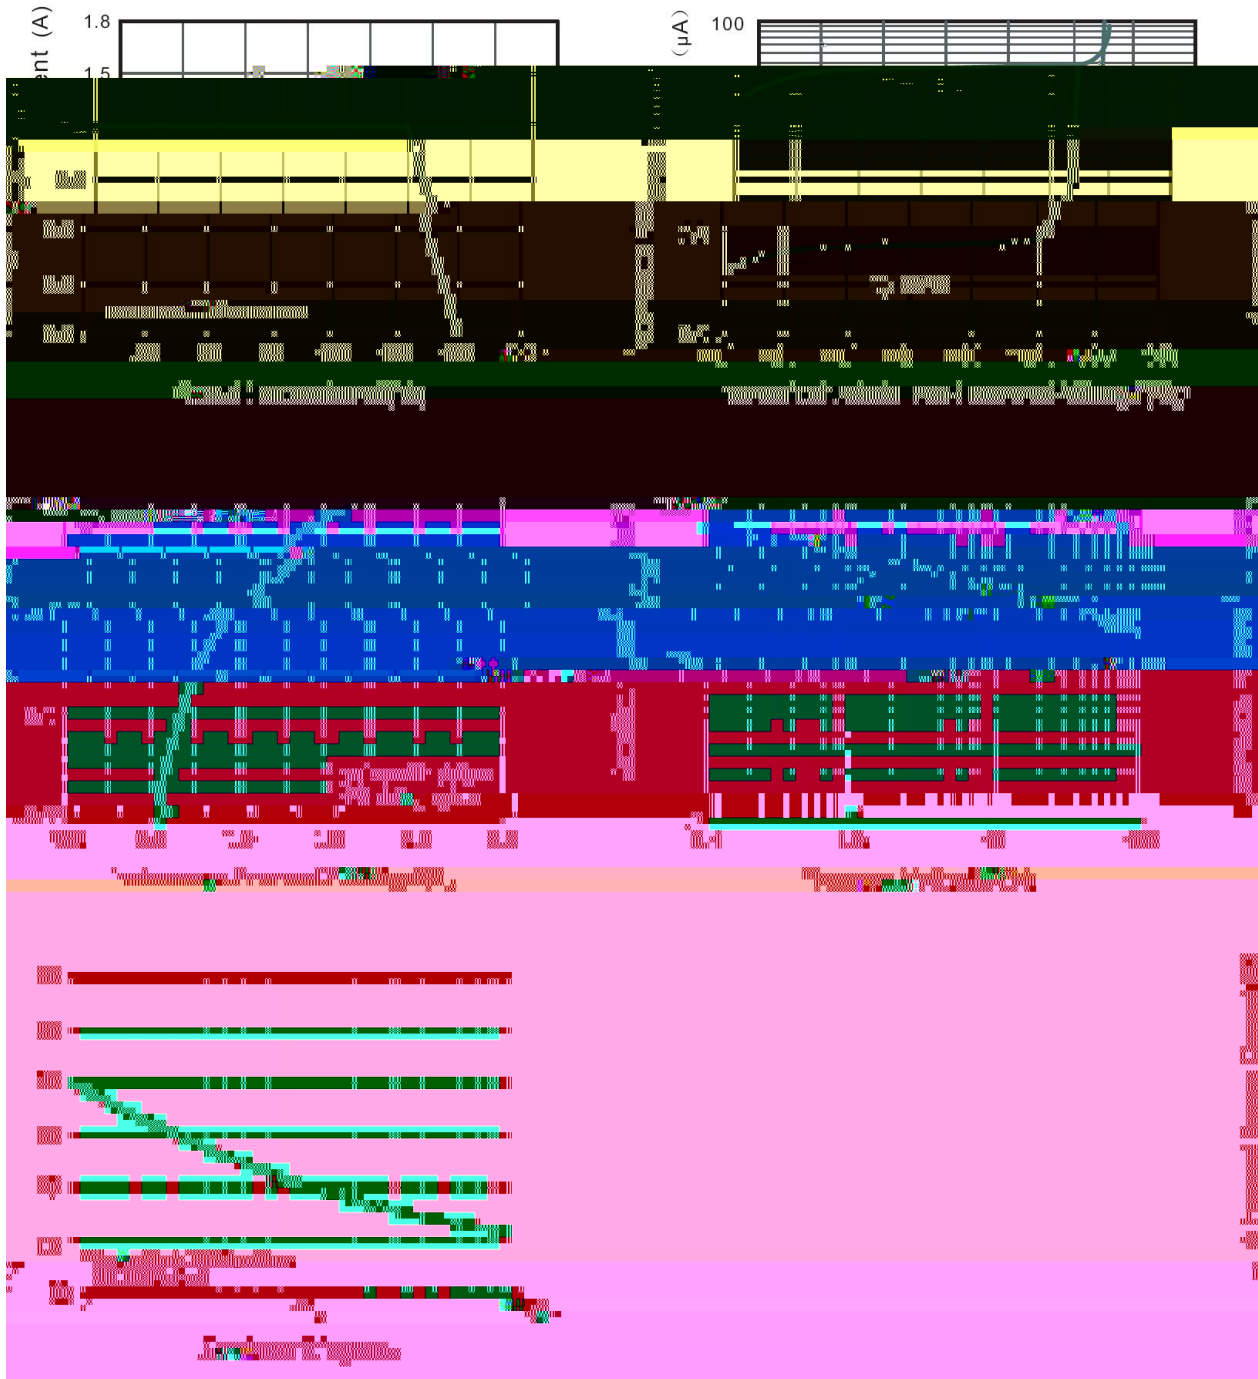

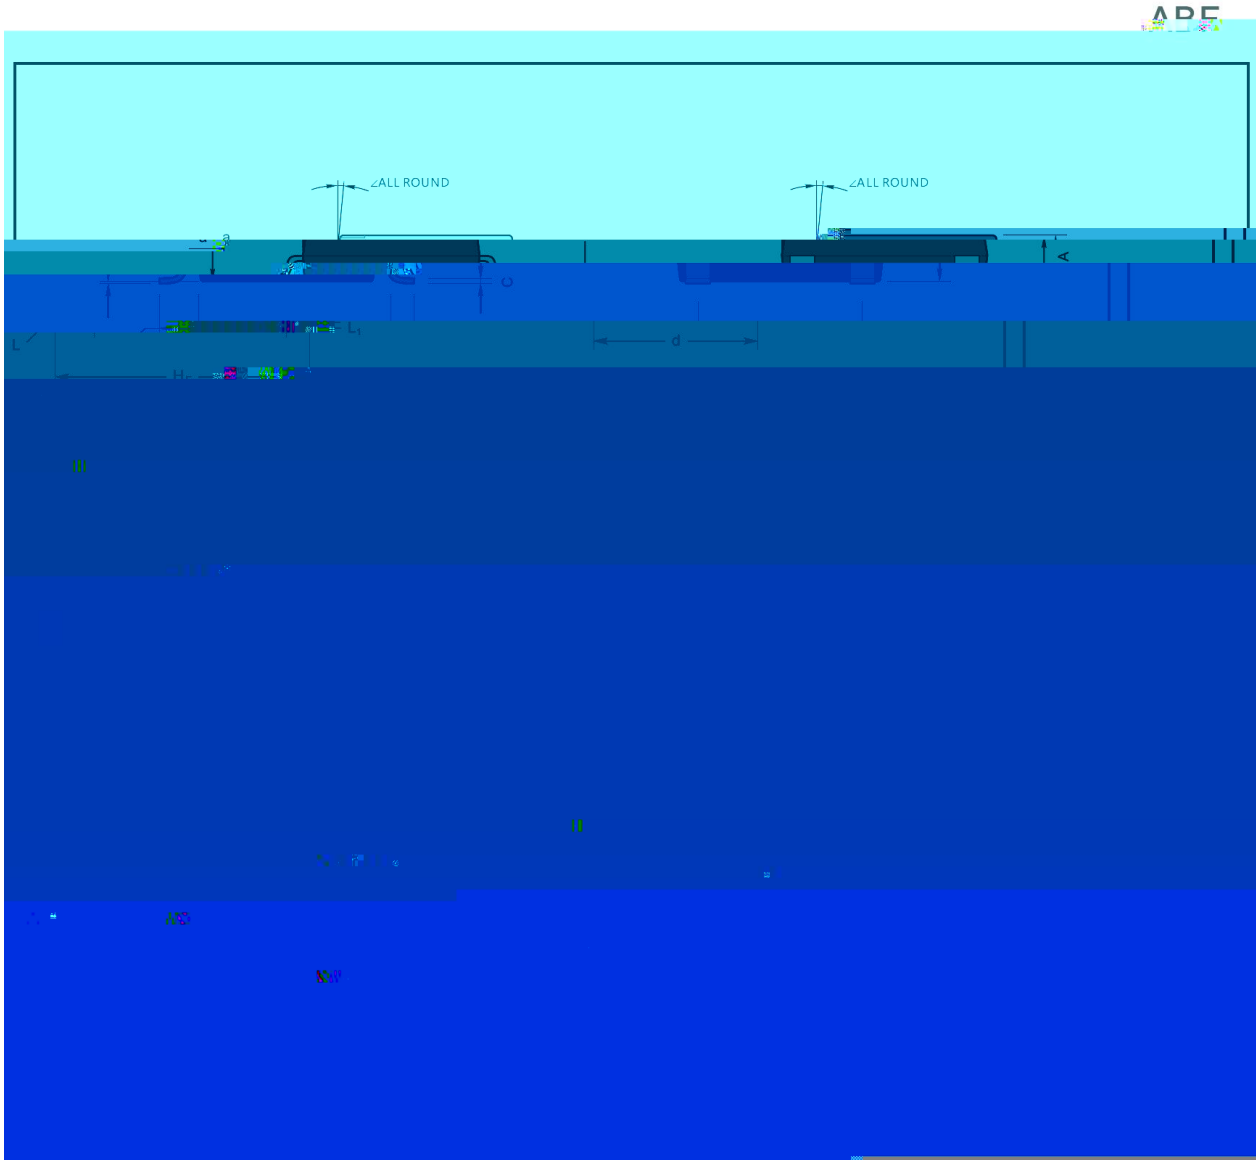

Marking

Type number	Marking code
FTB10F-12	F10F12



The diagram shows a rectangular component with four pins (two on the top, two on the bottom). The marking code 'F10F12' is printed in the center of the component. A small semi-circular notch is located on the top edge of the component, centered between the two top pins.

Rev.D May.-2017

Rev.D May.-2017

