


Re e




50~1000V 20A GBJ
Glass Passivated Bridge Rectifiers, Reverse Voltage:50~1000V,Forward Current:20A,GBJ package.

PCB UL 94V-0
Ideal for printed circuit board, Case material molded plastic, The plastic material has U/L flammability classification 94V-0. Halogen free product.

General purpose.

!"### \$!"% " & &
Rev.A .Jul.-2019




' () (i * + , ,)

& &

& &


& & - & & A < 4 B 1 ? C & P ? 2 > 4 E 5 > 1 6 ? 2 &

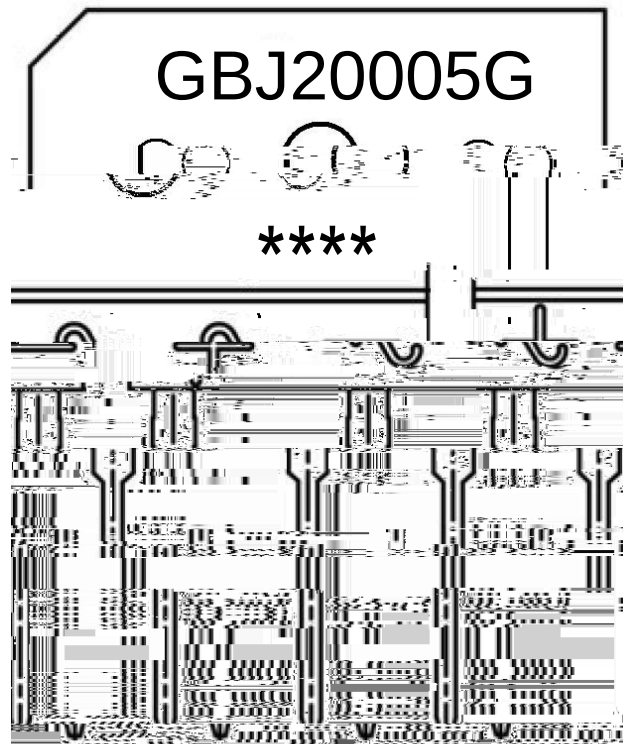


GBJ20005G

Note:

GBJ20005G: Product Type.
****: Lot No. Code, code change with Lot No.



K M& & -& &) / J D / 4 < E 4 / & G 4 6 = 1 ; / & = 6 4 & ' 1 D & * 6 ; 3 / 4 1 ? C K G H Q 9 4 / / M &

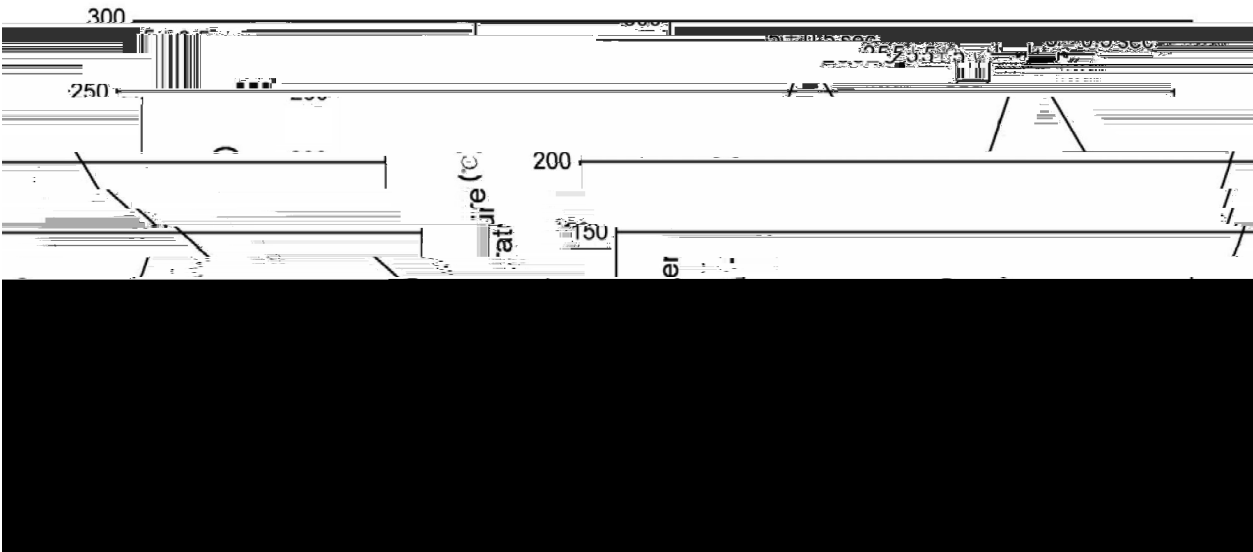

- Note:
- | | | | | | |
|---|-------|-----|-----------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

&& -&&& . / 2 1 2 < ? 5 / & > 6 & * 6 ; 3 / 4 1 ? C & + / < & &) / 2 > & : 6 ? 3 1 > 1 6 ? 2 &

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

&& -&&& G < 5 B < C 1 ? C & * G , : R &

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag 袋	Inner Box 盒	Outer Box 箱
GBJ	-	-						

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube 套管	Inner Box 盒	Outer Box 箱
GBJ	/	/	200	10	2000	/	306*108*42mm	322*246*252mm

&& -&&& S 6 > 1 5 / 2