

/ Descriptions

WR0553

TO-220 Plastic package Schottky diode .

/ Features

Low forward voltage drop,low power losses,High efficiency operation.


/ Applications

RU0lq j


GF0GF

For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.

/ Equivalent Circuit



/ Pinning



PIN1 Anode

PIN 2 Cathode





PIN 3 Anode

/ h_{FE} Classifications & Marking

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Reverse Voltage	V_{RRM} V_{RWM} V_{DC}	45	V
RMS Reverse Voltage	V_{RMS}	31.5	V
Average forward rectified Current	I_F	2 X 10	A
Non Repetitive Peak Surge Current	I_{FSM}	160	A
Thermal Resistance Junction to Case	$R_{\theta Jc}$	2.8	/W
Junction and Storage Temperature Range	T		


/ Electrical Characteristic Curve

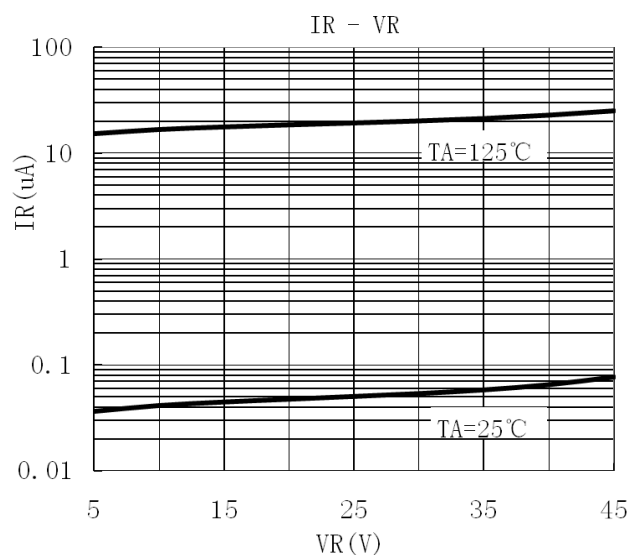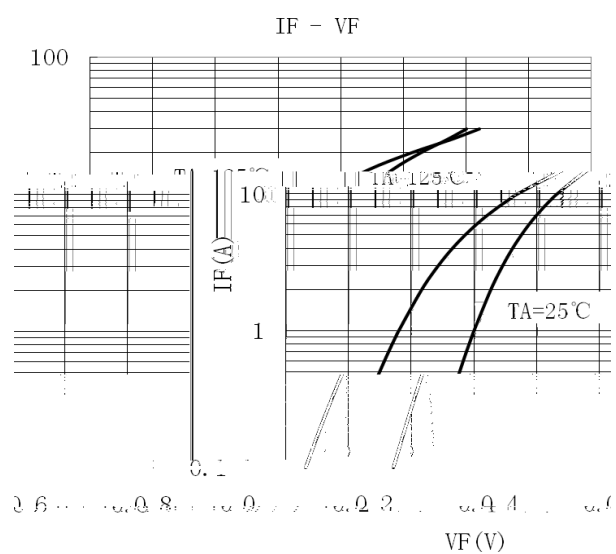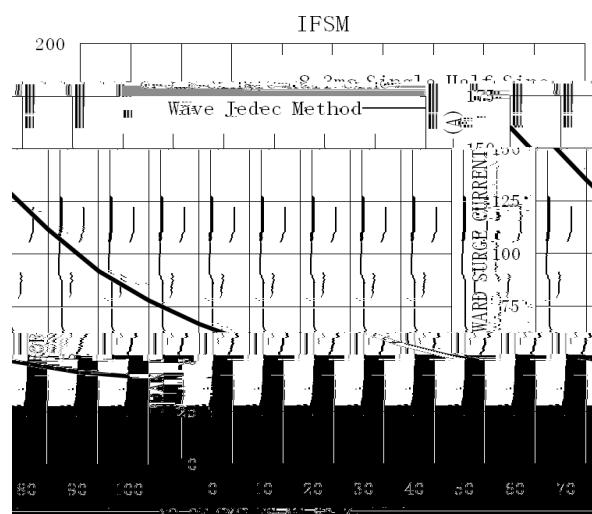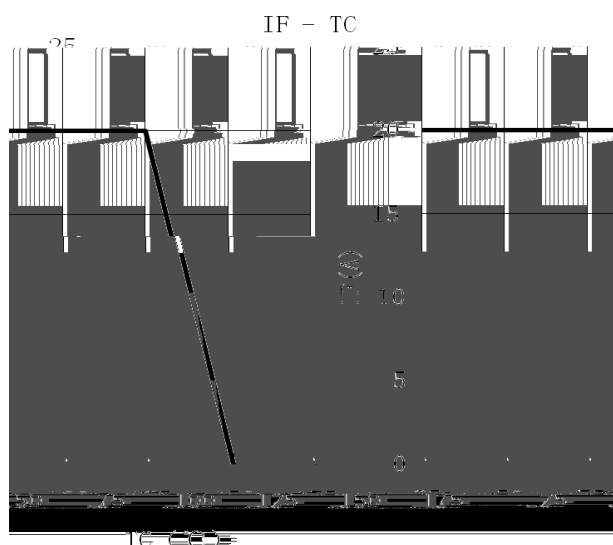

/ Package Dimensions



/ Marking Instructions

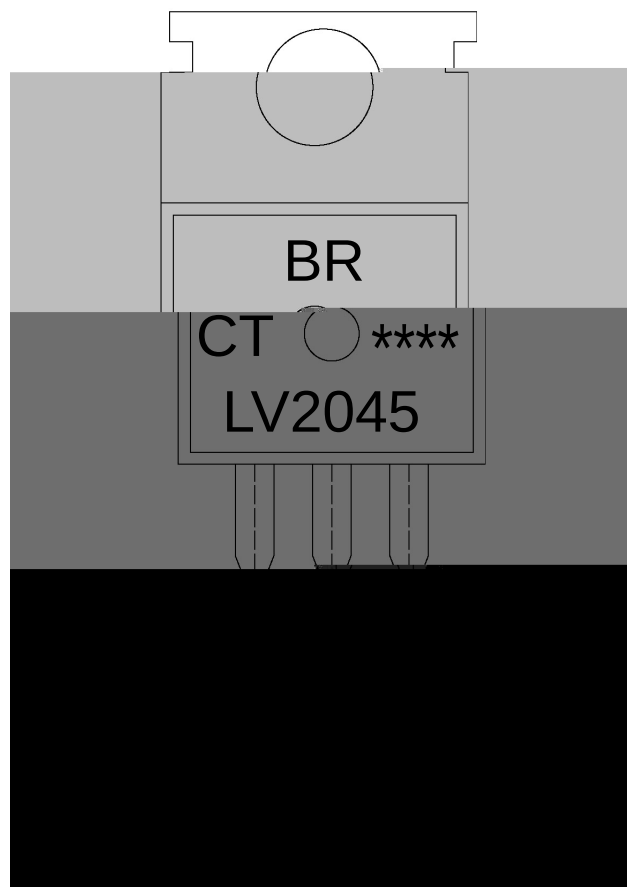

EU

0Y5378

FW:

Note:

BR: Company Code

0Y5378 Product Type.

FW: Internal Structure

****: Lot No. Code, code change with Lot No.

(