


!"#\$% #!"#\$
Rev.E Jan.-202



0.5A MBF
0.5A Surface Mount Glass Passivated Bridge Rectifier, MBF thin package。
&

100V~1000V 0.5A

Glass Passivated Chip Junction, Reverse Voltage:100to1000V, Forward Current: 0.5A, High Surge Current Capability, Designed for Surface Mount Application, Halogen free product.
&

General purpose.=


& &

!


5.2145 420


MBF

MPF mechanical data



& & & 95:2;<&N;3>5?6>27;3&

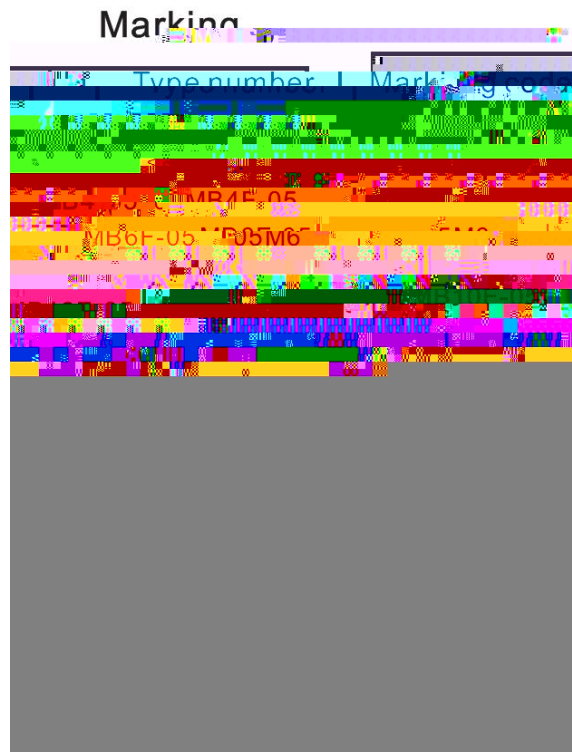



& &

