

/ Descriptions



Schottky Barrier Diode in a TO-220 Plastic Package.

/ Features

Low power loss, high efficiency, HF Product.

/ Applications

For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.

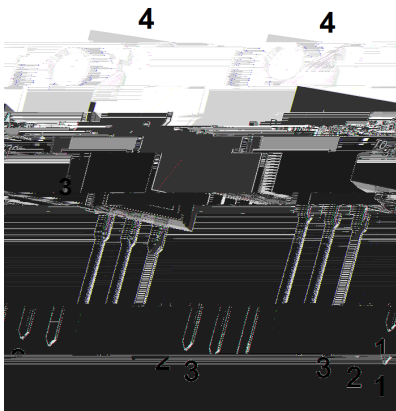/ Equivalent Circuit**/ Pinning**

PIN1 Anode

PIN 2,4 Cathode

PIN 3 Anode

/ Marking

See Marking Instructions.

MBR10300

Rev.A Oct.-2024





蓝箭电子
BLUE ROCKET ELECTRONICS


DATA SHEET


Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	300	V
Working Peak Reverse Voltage	V_{RWM}		
Reverse Voltage	V_R	300	V
Average Rectified Forward Current	$I_{F(AV)}$	10	A
Non Repetitive Peak Surge Current	I_{FSM}	100	A
Junction Temperature Range	T_j	150	
Storage Temperature Range	T_{stg}	-65 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Voltage	V_R	$I_R = 0.5mA$	300			V
Peak Forward Voltage	V_F	$I_F = 3.0A(T_j = 25^\circ C)$		0.79	0.83	V
		$I_F = 10A(T_j = 25^\circ C)$		0.89	0.94	V
Instantaneous Reverse Current	I_R	$V_R = 300V(T_j = 25^\circ C)$ $V_R = 300V(T_j)$			0.1	mA

/ Electrical Characteristic Curve

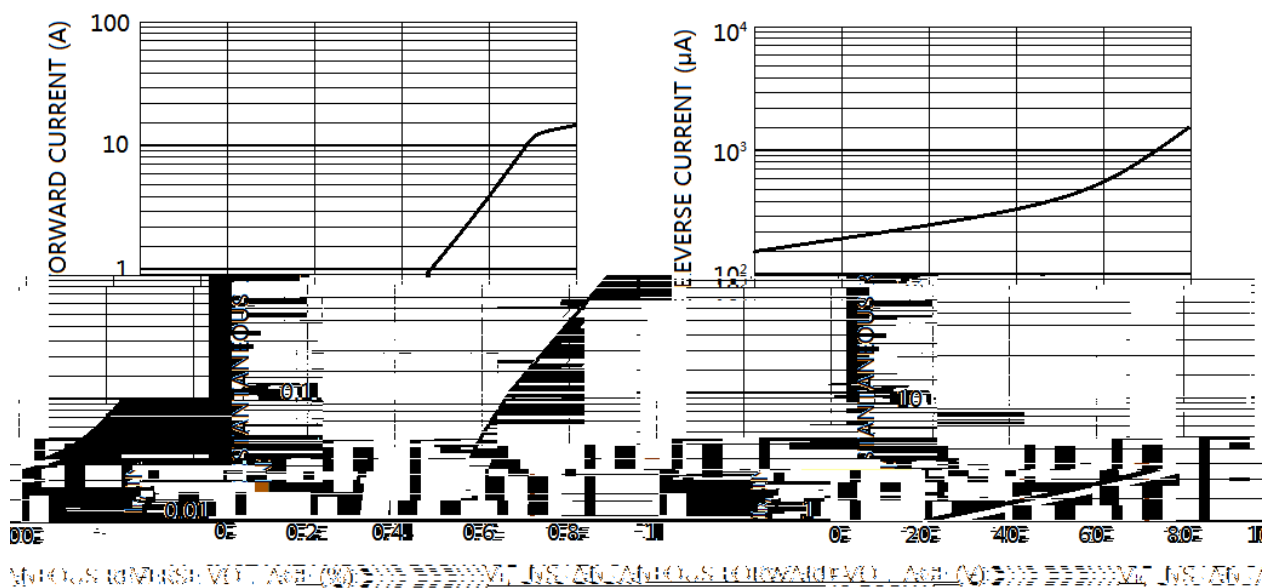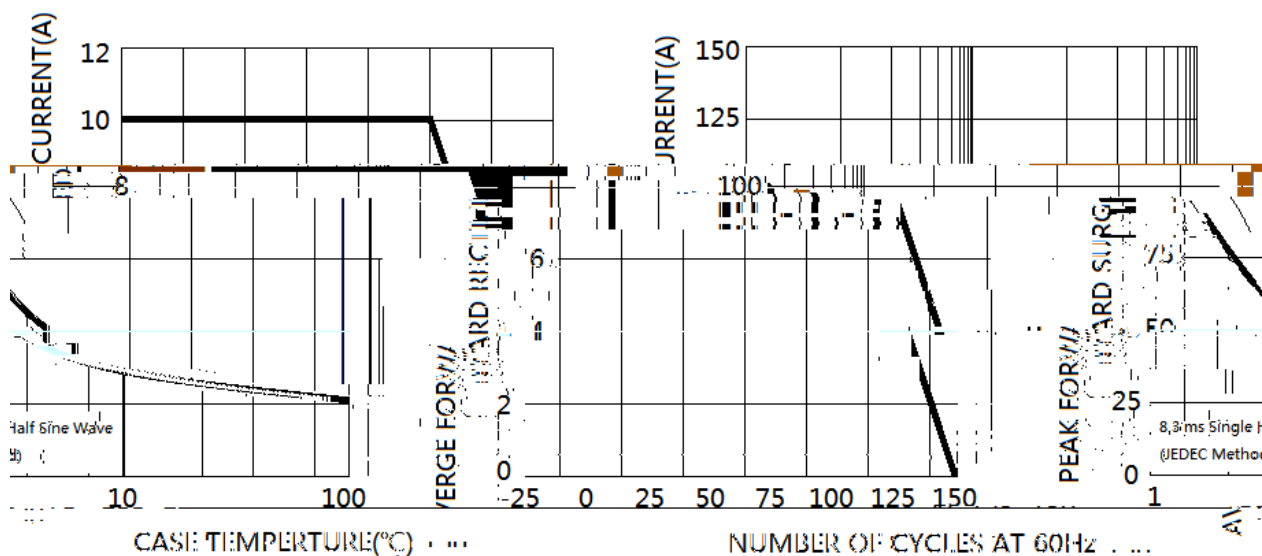



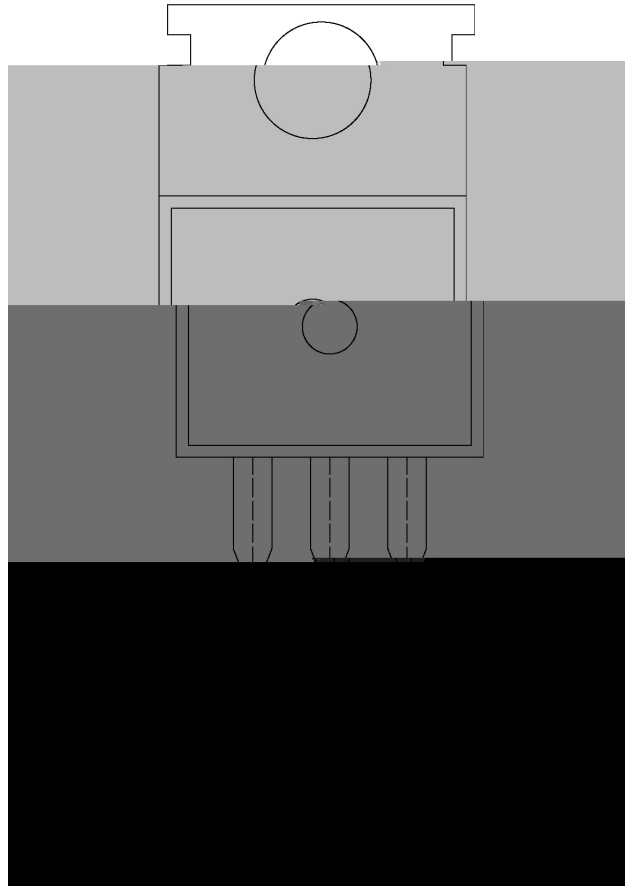

() / Temperature Profile for Dip Soldering(Pb-Free)

- 1

25 150

60 90sec;
- 2

255 5

5 0.5sec;
- 3

2 10
- Note:
1.Preheating:25~150 , Time:60~90sec.
2.Peak Temp.:255 5 , Duration:5 0.5sec.