

100V~1000V

4.0A

Fig.1 Average Rectified Output Current Derating Curve






Fig.2 Typical Reverse Characteristics




UMSB

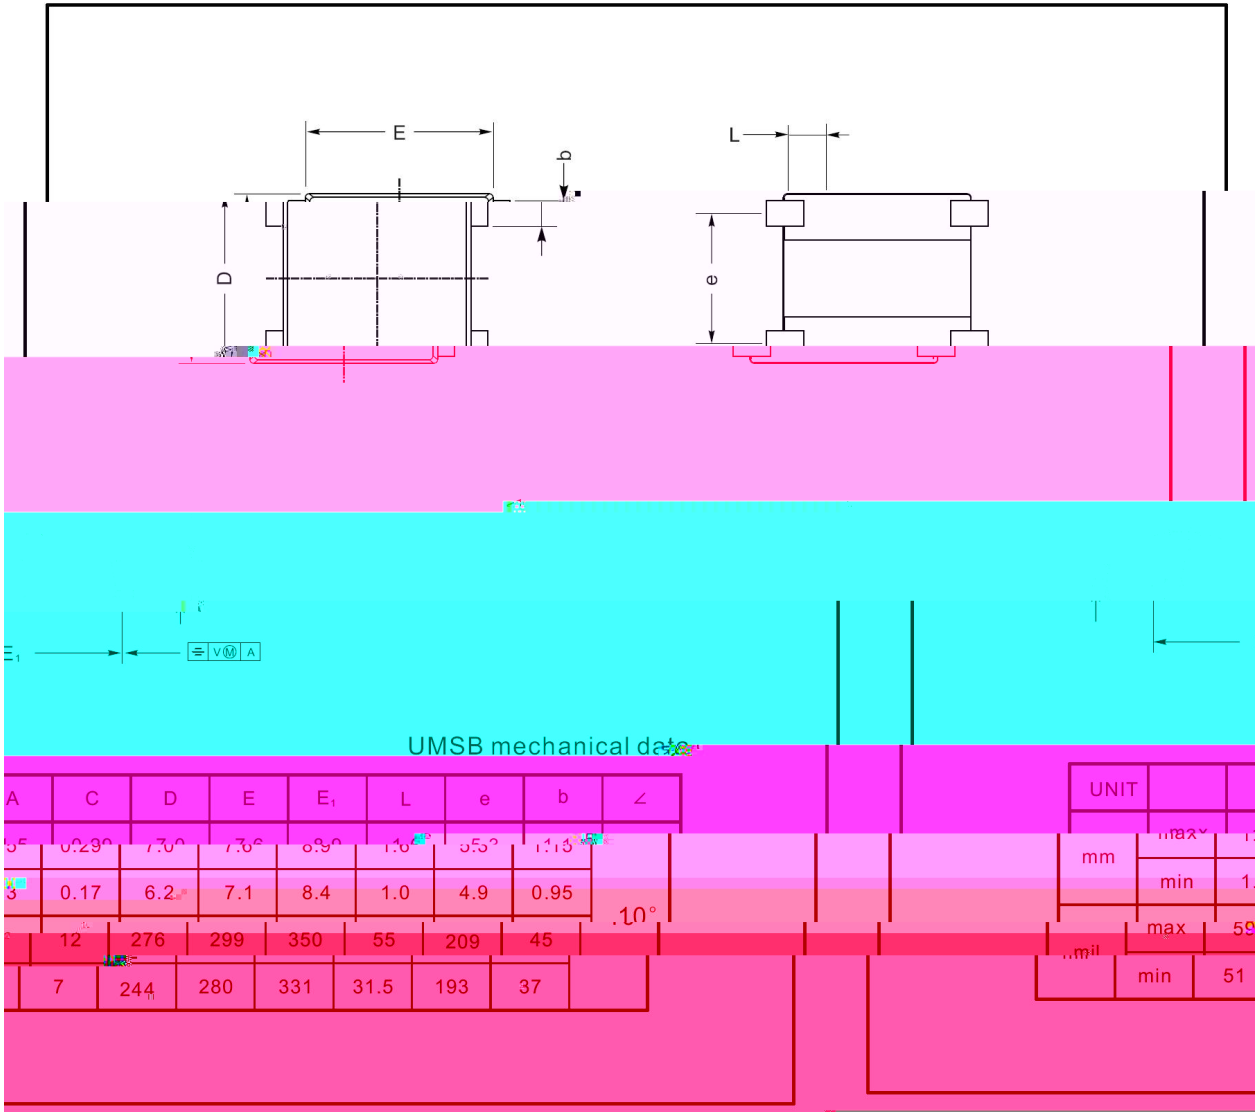

Marking

Marking code
MB40B
MB40D
MB40G
MB40J
MB40K
MB40M

Type number
MSB40B
MSB40D
MSB40G
MSB40J
MSB40K
MSB40M

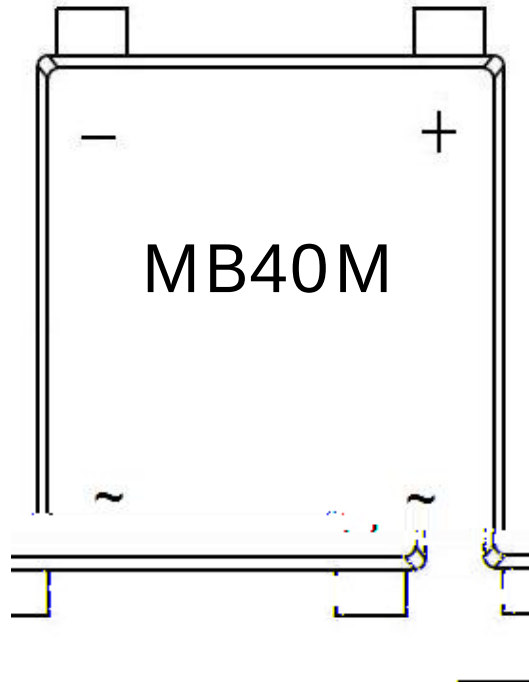

MB40M

1 *


3 *

MB40M

*

*

Temperature Profile for IR Reflow Soldering(Pb-Free)

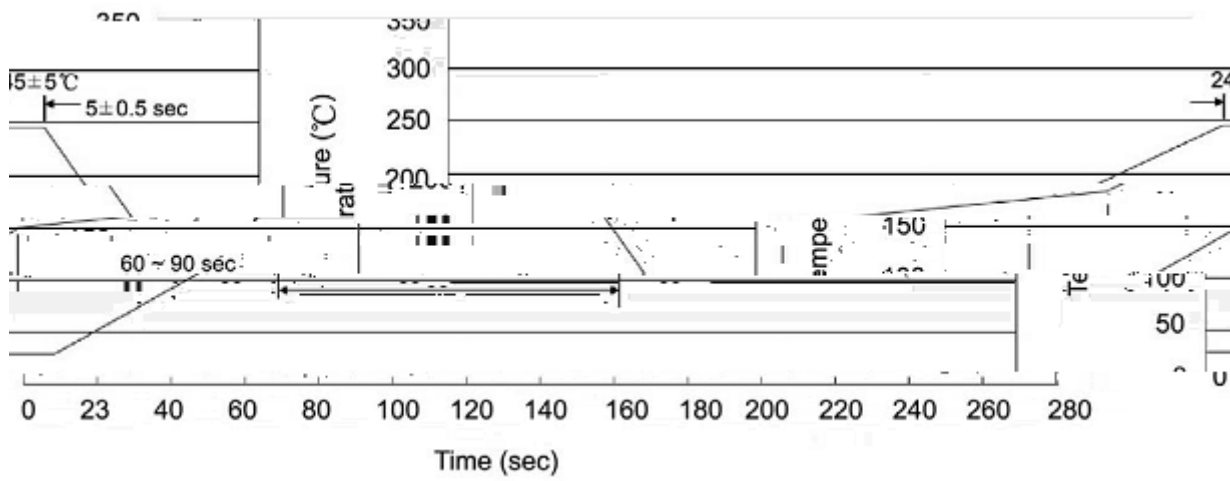

±

±

±

±

±

±