


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	V
Maximum RMS voltage	V_{RMS}	28	V
Maximum DC Blocking Voltage	V_{DC}	40	V
Maximum Average Forward Rectified Current Tc=100	$I_{F\ AV}$	0.2	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	13	A
Operating and Storage Temperature Range	T_j, T_{stg}	-55~+125	

)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Maximum Instantaneous Forward Voltage	V_F	$I_F=0.2A$			0.6	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_a=25$			5	uA
		$T_a=100$			100	uA

/ **Electrical Characteristic Curve**

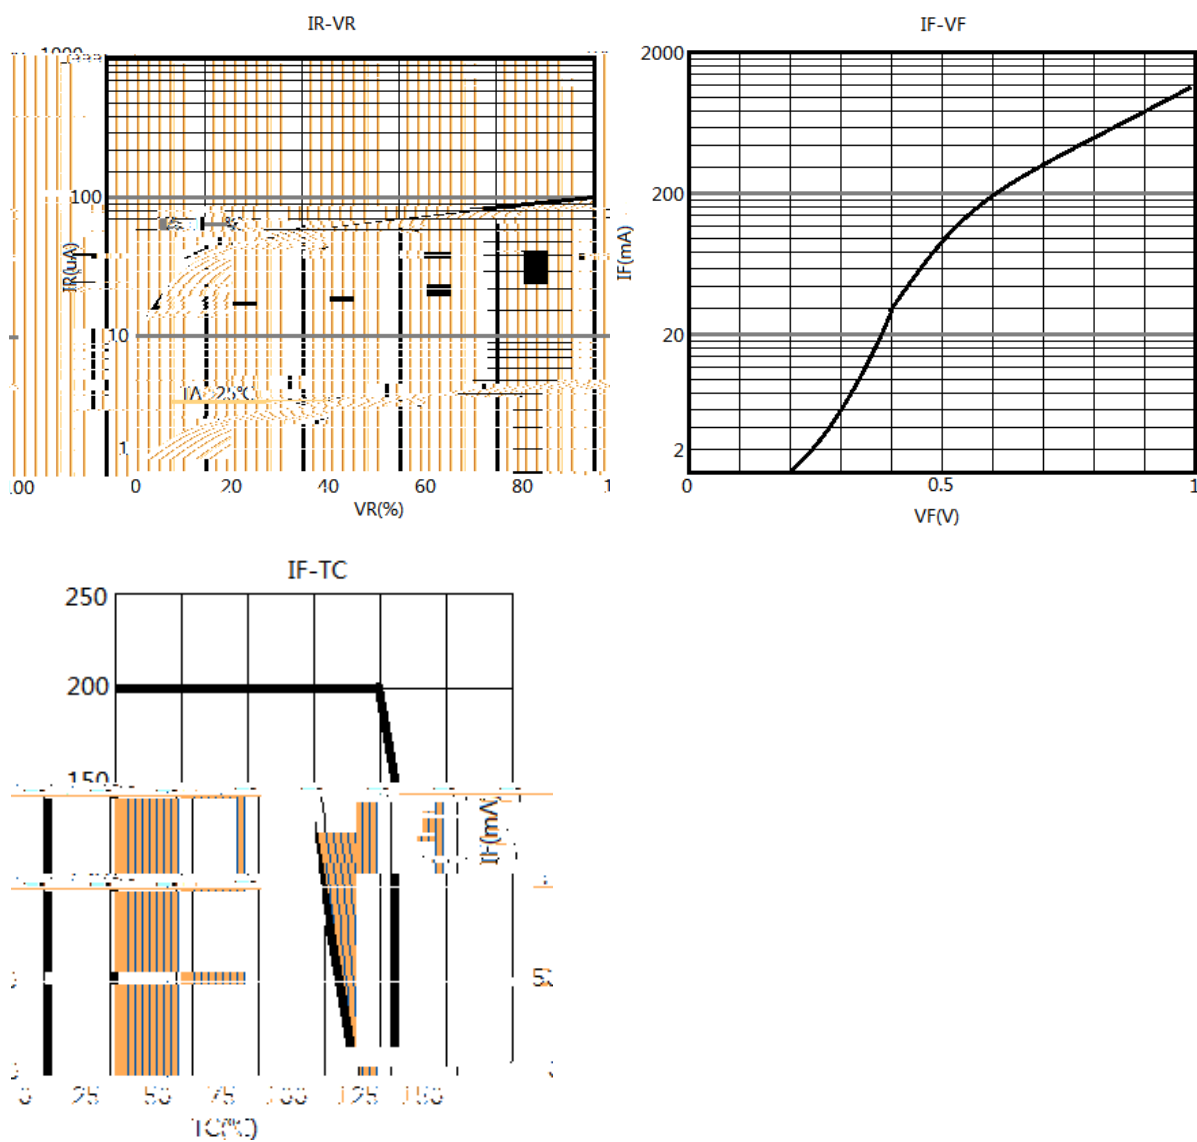


Unit: mm

B	0.25	0.40
C	0.08	0.18
D	1.20	1.40
E	1.40	1.80

PIN: 1.CANID 2.ANID

S D-323

/ Marking Instructions

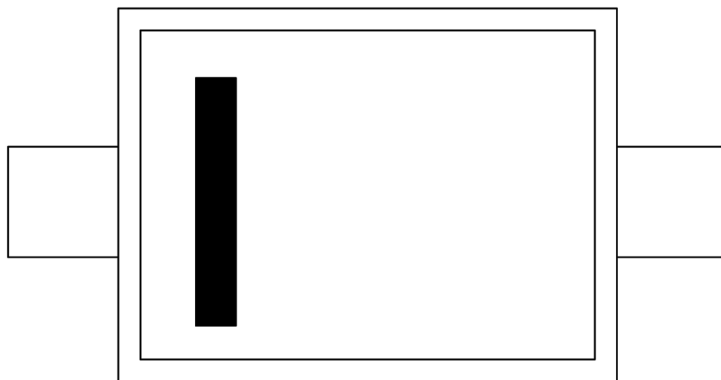

K

VG

Note:

H: Company Code

SD: Product Type r -1.9086 TD()Tj/TT9 1 ()Tj0 -1.9029 T2640.1.960 04 Tc.2228

