

RS3AC~RS3MC

Rev.B Feb.-2021



DATA SHEET




RS3AC~RS3MC

Rev.B Feb.-2021



Parameter	Symbol	Rating							Unit
		RS3AC	RS3BC	RS3DC	RS3GC	RS3JC	RS3KC	RS3MC	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum A	um A		u	m	T			h	

/ Electrical Characteristic Curve

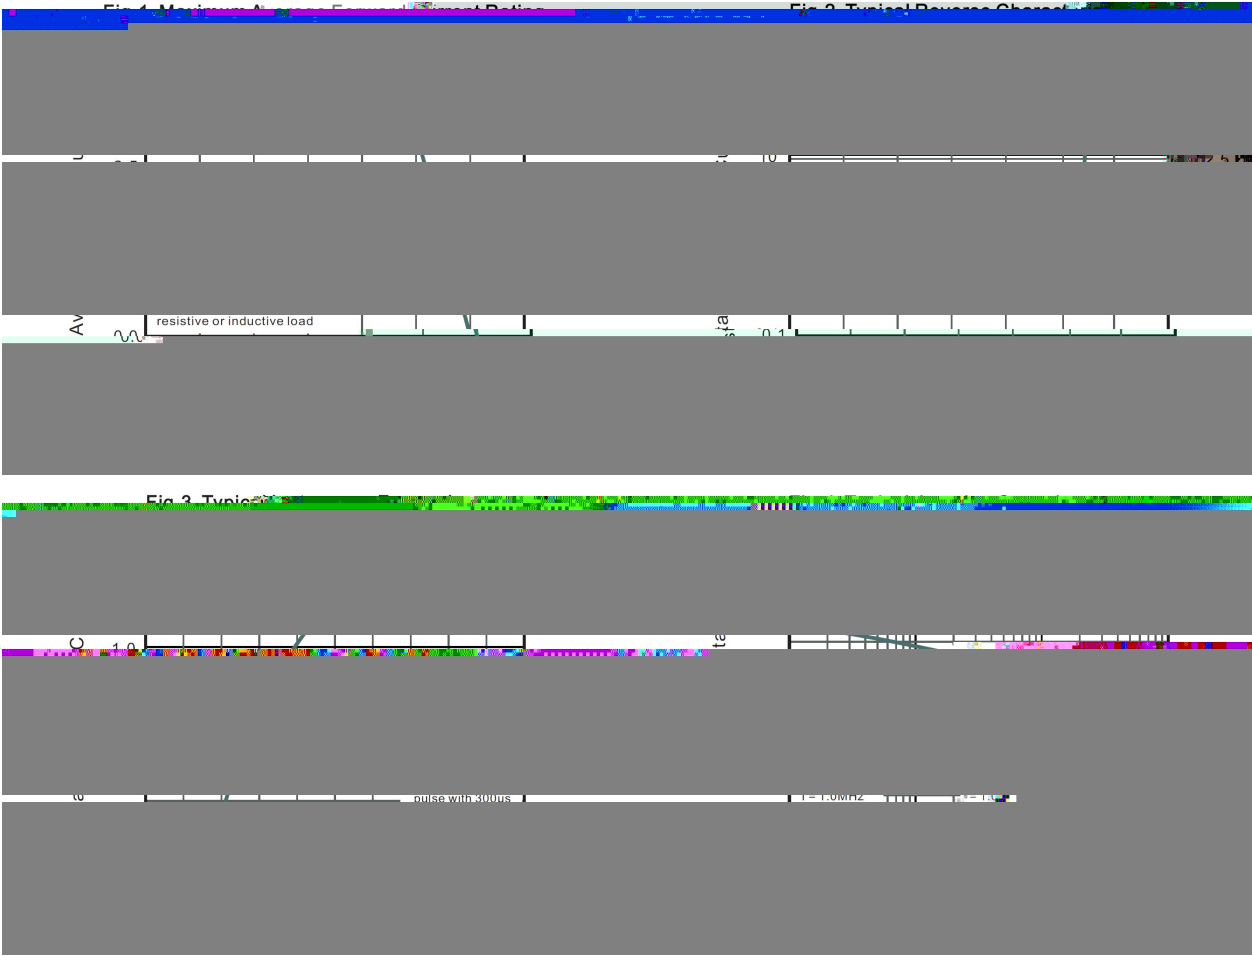



RS3AC~RS3MC

Rev.B Feb.-2021

DATA SHEET

/ Marking Instructions

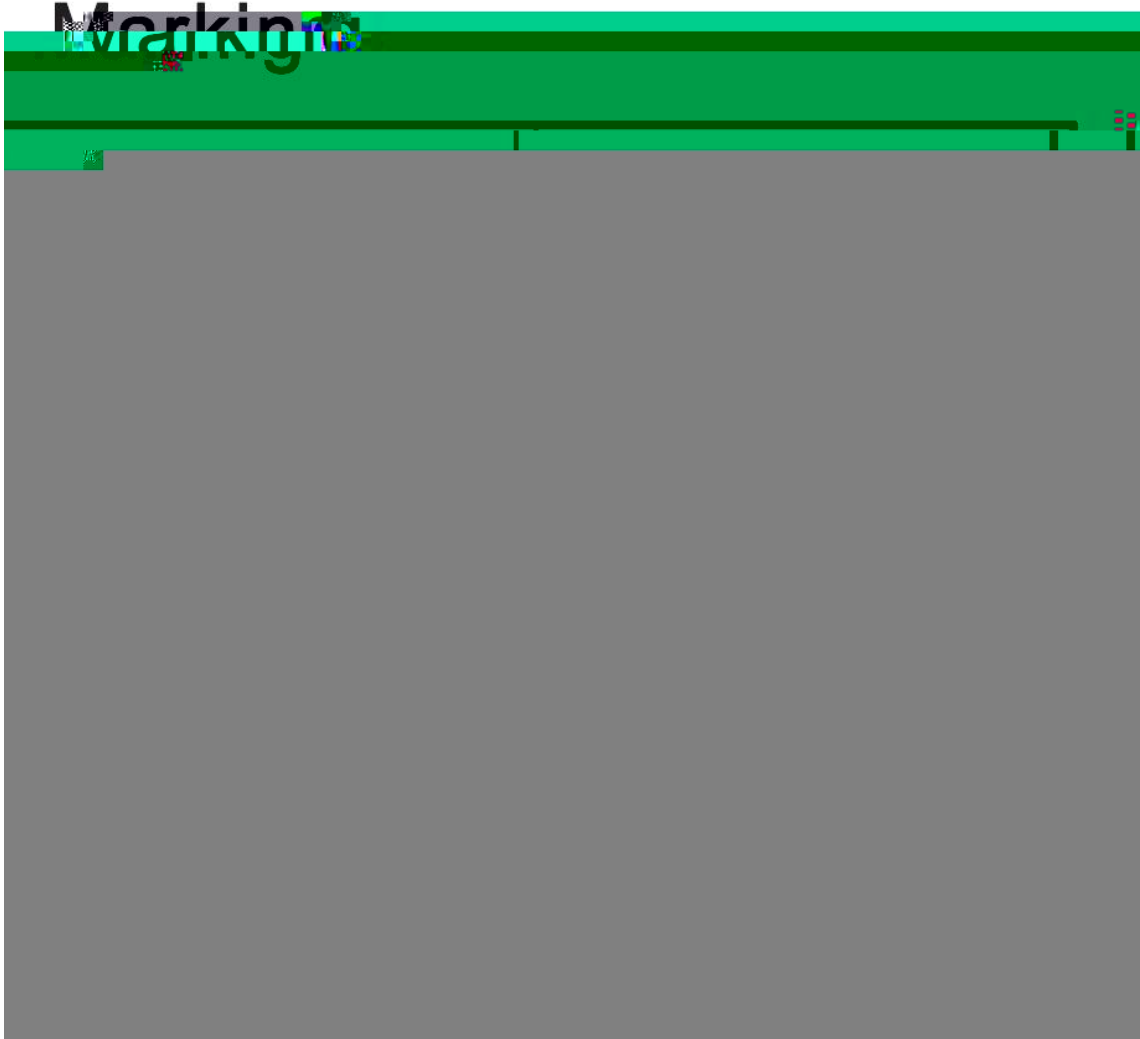

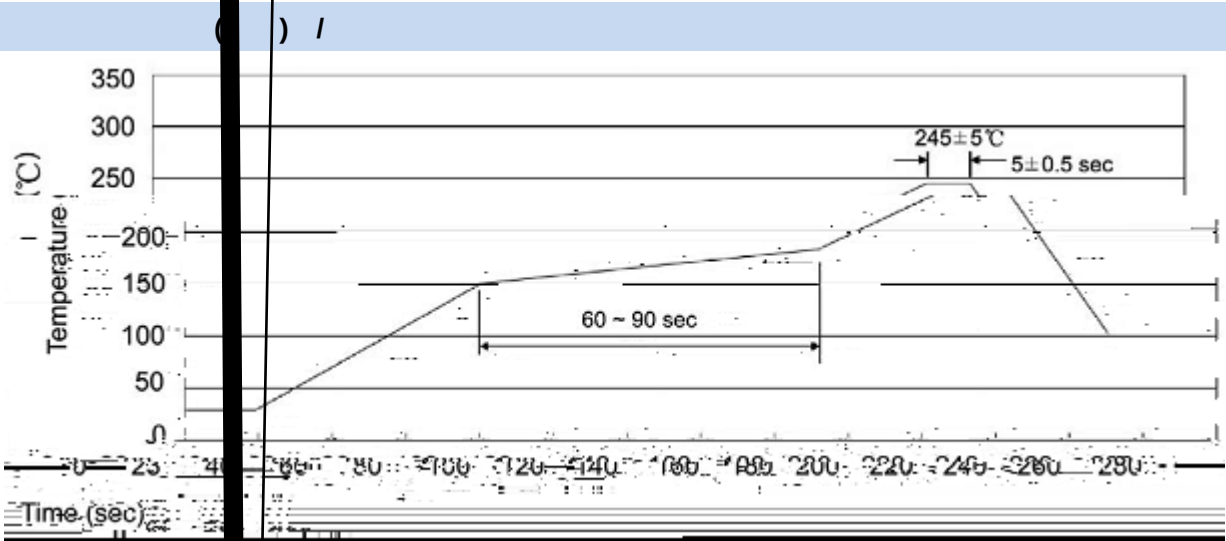

- Note:
- | | | | |
|---|----------|-------------|--|
| 1 | 25 ~ 150 | 60 ~ 90sec; | 1.Preheating:25~150°C, Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2 ~ 10 | 10°C/sec. | 3. Cooling Speed: 2~10°C/sec. |

Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box

<http://www.fsbrec.com>

7 / 7