

SS32B~SS320B

Rev. B Dec.-2023



DATA SHEET

20V~200V

3.0A SMB

Surface Mount Schottky Barrier Rectifiers, Reverse Voltage 20 to 200V, Forward Current: 3.0A, SMB package.

RoHS 2011/65/EU

Glass Passivated Chip Junction, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. HF product.



General purpose.



SS32B~SS320B

Rev. B Dec.-2023

/ Electrical Characteristic Curve

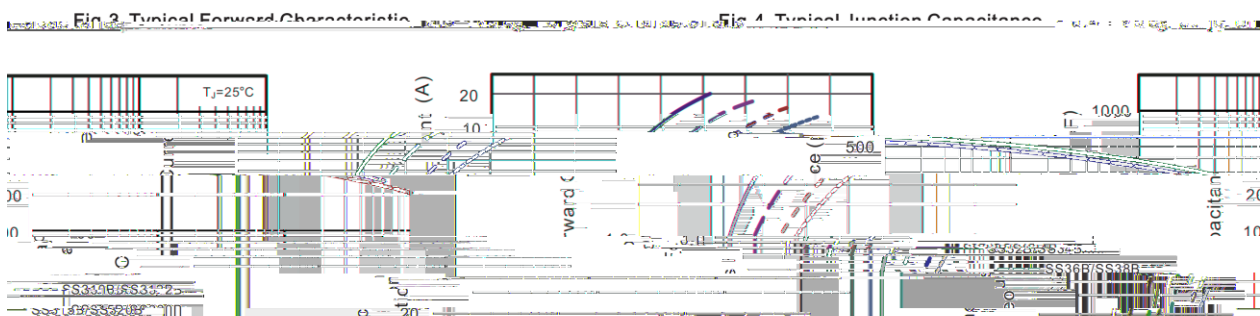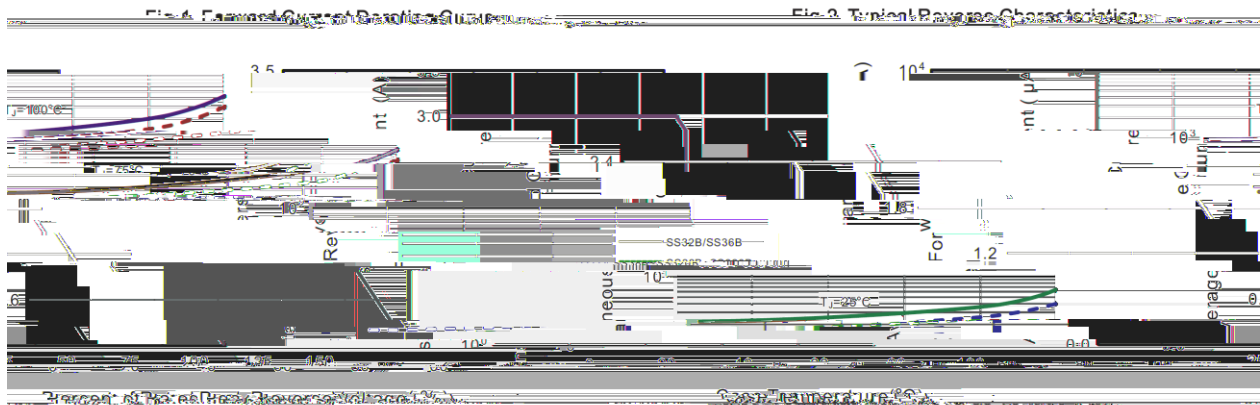


SS32B~SS3

/ Marking Instructions



437 EM37JE	SS32		
	****	1	*

() / Temperature Profile for IR Reflow Soldering(Pb-Free)



1 25 150 60 90sec;

Note:

1.Preheating:25~150