



Rev. A Nov.-2019

Surface Mount Schottky Barrier Rectifiers, Reverse Voltage 60V, Forward Current: 2.0A ,SMB package.

Low power loss, High efficiency, High forward surge current capability, For surface mounted applications. HF product.



General purpose.



Rev. A Nov.-2019




0 8 9 = > ?

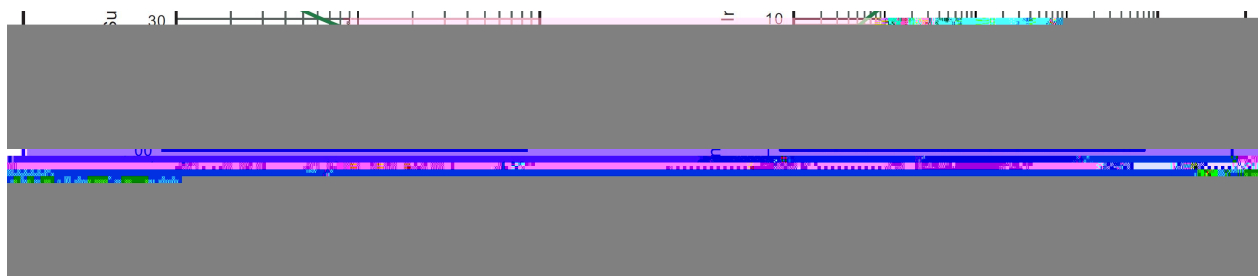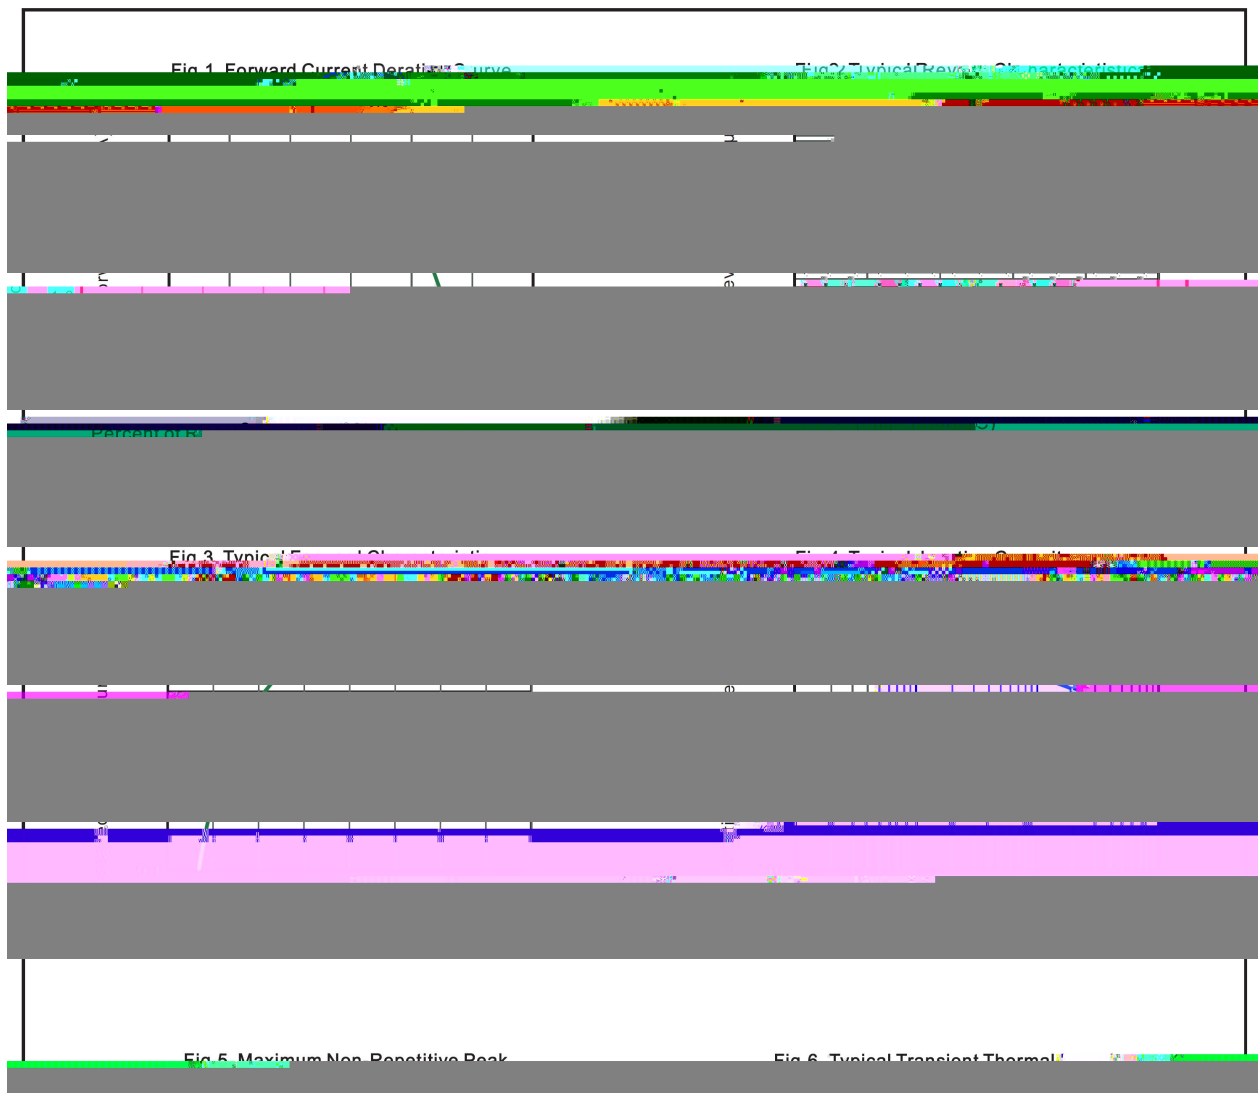




@ABC?

SMB

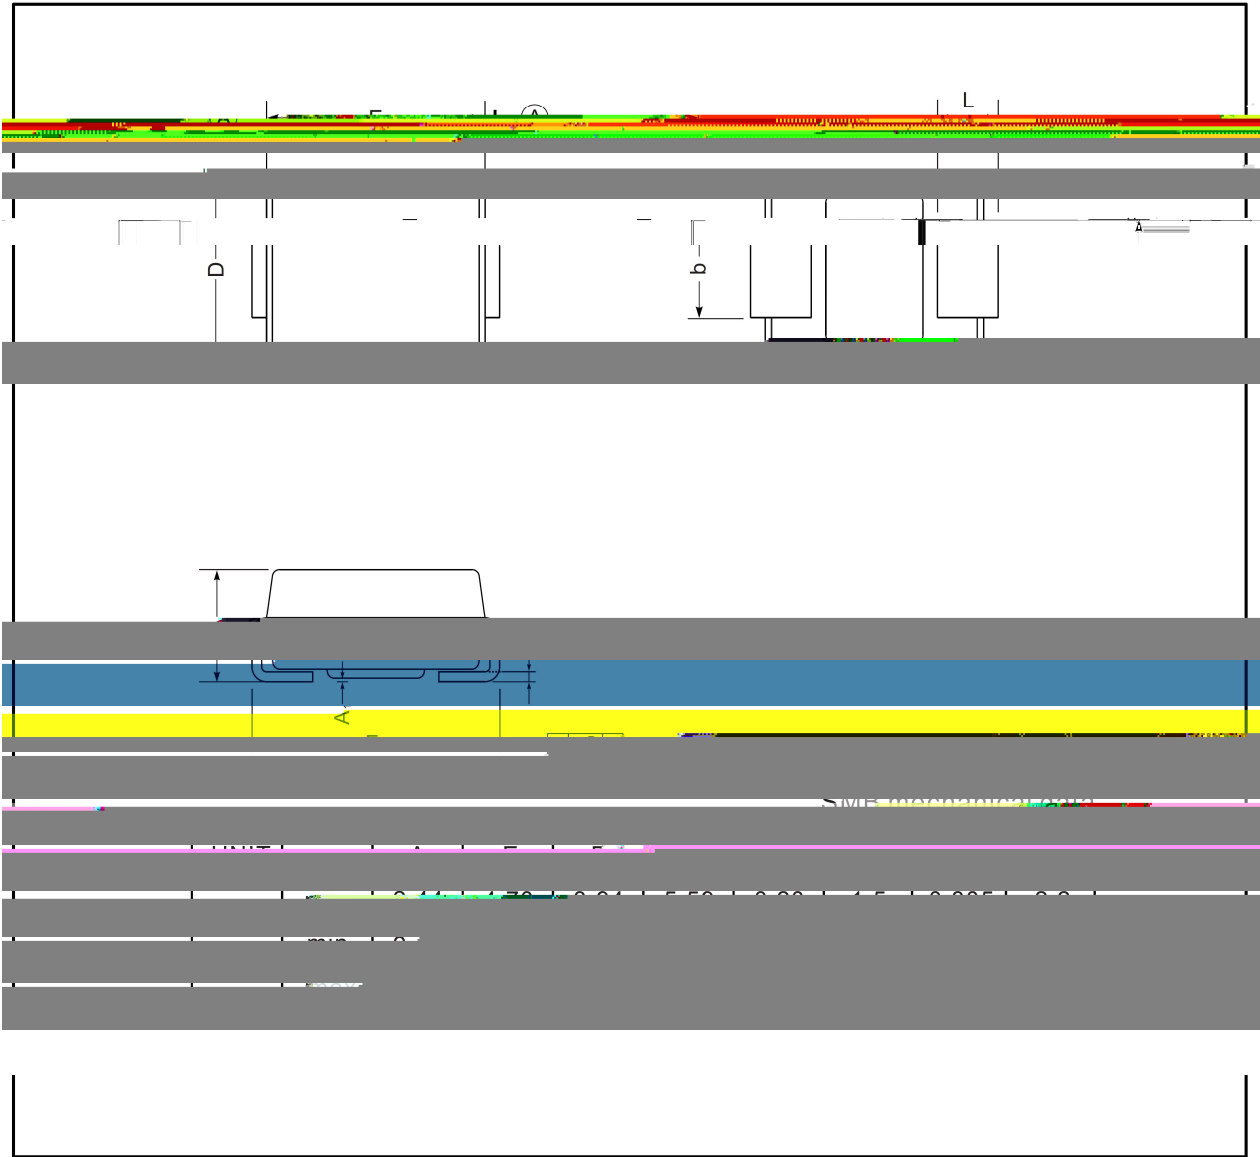




" # D E

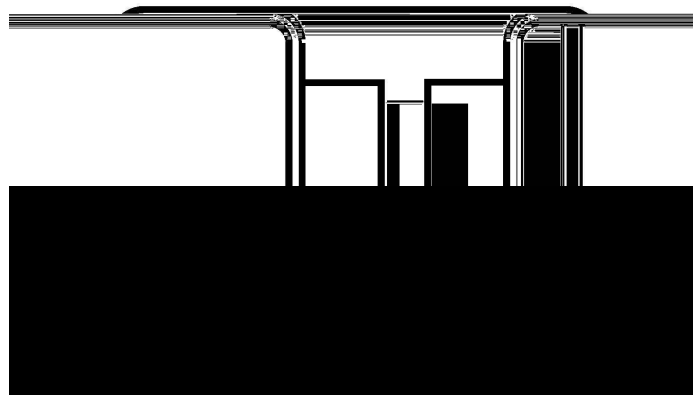

F



H I J K L = > ? M N O P Q R P S T U V S P G W S X Y Z [P G Y X S G \] G] P Y [X ^ G _ X [` P S Z a b c W d e f S P P g

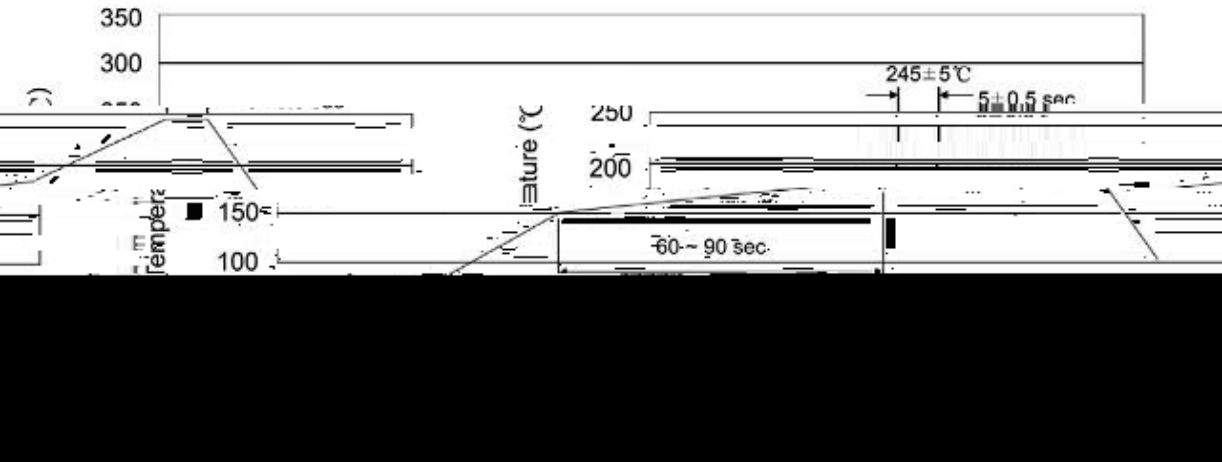

Note:

- 1. Preheating: 150~180 °C, Time: 60~90 sec.
- 2. Peak Temp.: 245±5 °C, Duration: 5±0.5 sec.
- 3. Cooling Speed: 2~10 °C/sec.

h J i j k l m n

260±5 10±1 sec. Temp.: 260±5 Time: 10±1 sec

o p q r

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SMB	3000	5	15000	5	75000	7" ×11	185X180X105	390X385X205

s * D E