

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|--|--|--|--|--|

# SSL56BF

Rev.A Jun.-2021



DATA SHEET

60V

5.0A

SMBF

Surface Mount Schottky Barrier Rectifier,

Note:

- 1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C
- 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

| Parameter | Symbol | Test condition | Rating | Unit |
|-----------|--------|----------------|--------|------|
|-----------|--------|----------------|--------|------|

## / Electrical Characteristic Curve

Fig.1 \_Forward Current Derating Curve

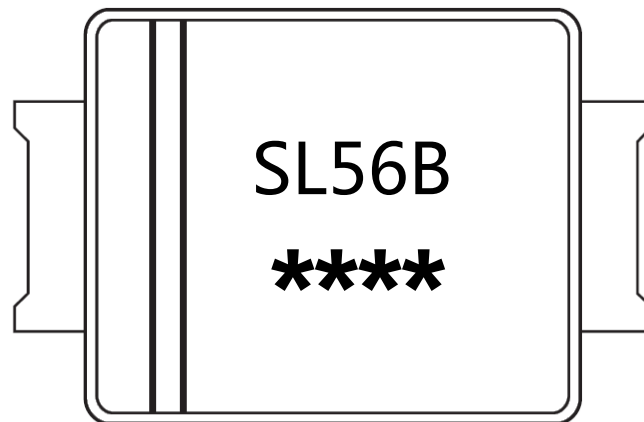


Fig.2 Typical Characteristics





**/ Marking Instructions**



SL56B

\*\*\*\*

1 \*

3 \*

Note:

SL56B      Product Type Code

\*\*\*\*      Lot No. Code    The 1st \* means:YM Code    The last 3 \* means:little Lot No  
Code

