



100V~1000V

1.2A



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

The recommended mounting pad size

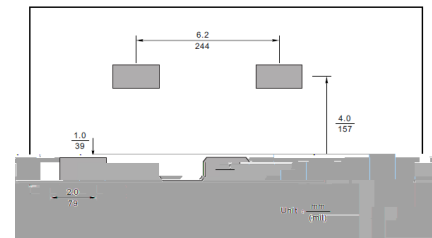




Fig.1 Average Rectified Output Current Derating Curve



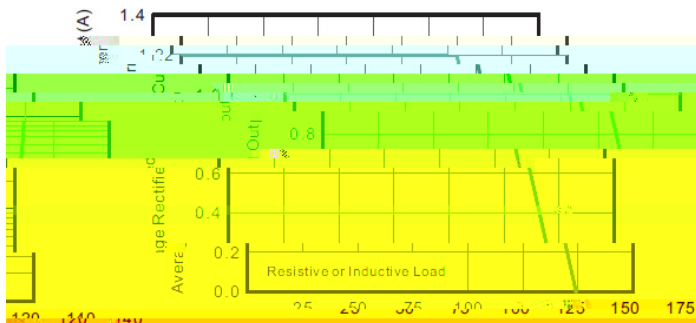


Fig.2 Typical Reverse Characteristics

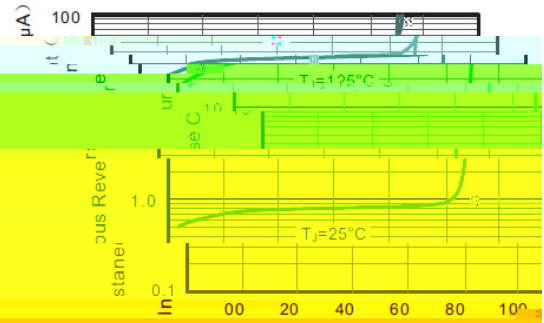

ABS/LBF

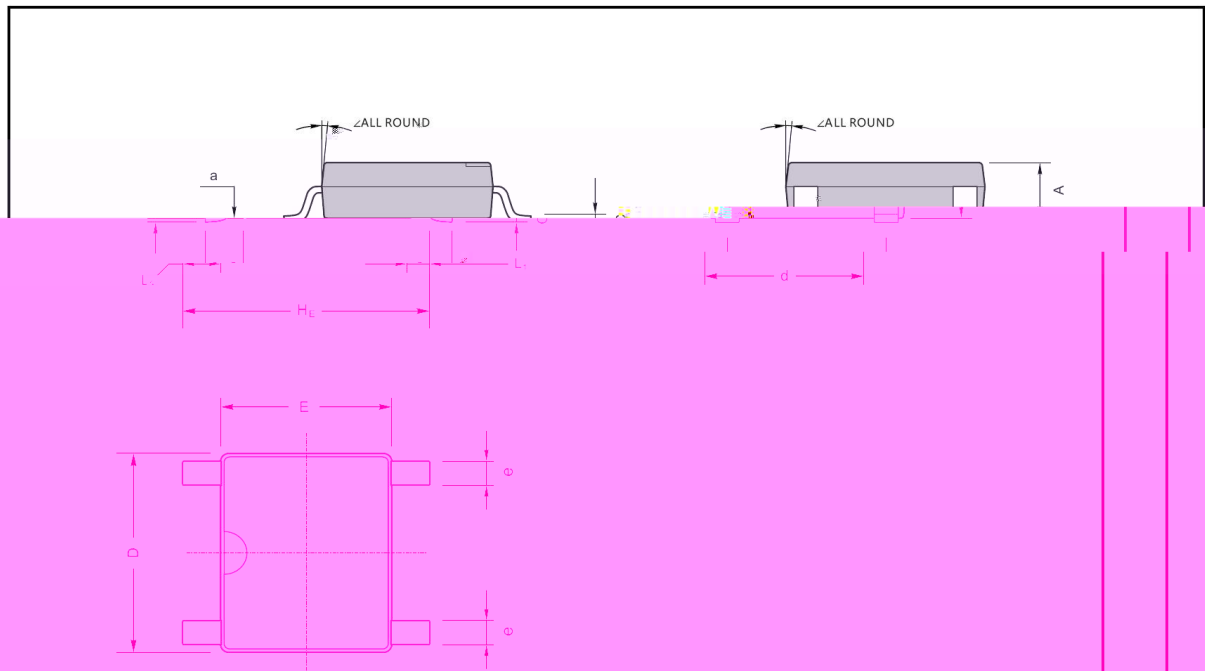

ABS/LBF mechanical data

UNIT		A	C	D	E	H _E	d	e	L	L ₁	a	∠
mm	max	1.5	0.22	5.2	4.5	6.4	4.2	0.7				
	min	1.3	0.15	4.9	4.2	6.0	3.8	0.5	0.95	0.6	0.2	
	max	0.50	0.87	2.05	1.77	2.52	1.65	2.28				7°
mm	min	51	5.0	102	166	226	150	25.5	37	24	4	

